

# MAXInox CABLE GLANDS




**7900**  
**7900A**



Stainless Steel 303 (X8 CrNiS 18-9)

Stainless Steel 316L (X2 CrNiMo 17-12-2)

Material:  
STAINLESS STEEL 303/316L  
Sealing-ring: NEOPRENE®  
Cable grip insert:  
POLIAMMIDE PA6.6  
O-Ring: NITRILE 70 sh A  
(factory fitted)  
Protection: IP 68  
Temperature range:  
-25°C to +100°C (continuous)

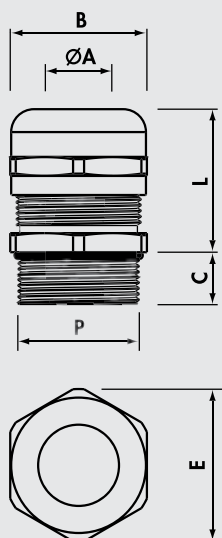

## MAXInox Stainless Steel AISI 303

Metric thread M 1.5 pitch CEI EN 60423 CEI EN 50262

Stainless Steel AISI 303	P	Fixing Hole (mm)	Ø A min-max (mm)	B Spanner (mm)	E (mm)	C (mm)	L min-max (mm)	Quantity Box/Bag
7900.M12	M12X1,5	12,5	3 - 7	16	18	6,5	16-20	90/30
7900.M16	M16X1,5	16,5	4,5-10	20	23	7,0	20-25	120/30
7900.M20	M20X1,5	20,5	7 -13	24	27	8,0	20-27	75/25
7900.M25	M25X1,5	25,5	10 -17	29	32	8,0	24-30	40/20
7900.M32	M32X1,5	32,5	11 -21	36	40	9,0	27-34	15
7900.M40	M40X1,5	40,5	19 -28	45	50	9,0	34-42	15
7900.M50	M50X1,5	50,5	26 -35	54	60	10,0	35-43	10
7900.M63	M63X1,5	63,5	34 -45	67	74	15,0	40-52	5

## MAXInox Stainless Steel AISI 316L

Metric thread M 1.5 pitch CEI EN 60423 CEI EN 50262

Stainless Steel AISI 316L	P	Fixing Hole (mm)	Ø A min-max (mm)	B Spanner (mm)	E (mm)	C (mm)	L min-max (mm)	Quantity Box/Bag
7900A.M12	M12X1,5	12,5	3 - 7	16	18	6,5	16-20	60/20
7900A.M16	M16X1,5	16,5	4,5-10	20	23	7,0	20-25	80/20
7900A.M20	M20X1,5	20,5	7 -13	24	27	8,0	20-27	60/20
7900A.M25	M25X1,5	25,5	10 -17	29	32	8,0	24-30	30/15
7900A.M32	M32X1,5	32,5	11 -21	36	40	9,0	27-34	12
7900A.M40	M40X1,5	40,5	19 -28	45	50	9,0	34-42	10
7900A.M50	M50X1,5	50,5	26 -35	54	60	10,0	35-43	7
7900A.M63	M63X1,5	63,5	34 -45	67	74	15,0	40-52	5



# MAXInox CABLE GLANDS

Stainless Steel 303 (X8 CrNiS 18-9)

Stainless Steel 316L (X2 CrNiMo 17-12-2)

## 7900 7900A



## MAXInox Stainless Steel AISI 303

Pg thread DIN 40 430

Stainless Steel AISI 303	P	Fixing Hole (mm)	Ø A min-max (mm)	B Spanner (mm)	E (mm)	C (mm)	L min-max (mm)	Quantity Box/Bag
7900.07	Pg 7	12,5	3 - 7	16	18	5,0	16-20	90/30
7900.09	Pg 9	15,5	4 - 8	17	19	6,0	17-23	90/30
7900.11	Pg11	19,0	4,5-10	20	23	6,0	20-25	60/30
7900.13	Pg13,5	20,5	5 -12	22	25	6,5	20-26	90/30
7900.16	Pg16	22,5	7 -13	24	27	6,5	20-27	60/30
7900.21	Pg21	29,0	10 -17	30	33	7,0	24-30	40/20
7900.29	Pg29	37,0	17 -25	40	45	8,0	30-37	30/15
7900.36	Pg36	47,0	20 -32	50	55	8,0	38-48	10
7900.42	Pg42	54,0	28 -38	57	63	10,0	36-46	5
7900.48	Pg48	60,0	34 -45	67	74	15,0	40-52	5

Material: STAINLESS STEEL 303/316L  
 Sealing-ring: NEOPRENE®  
 Cable grip insert: POLIAMMIDE PA6.6  
 O-Ring: NITRILE 70 sh A (factory fitted)  
 Protection: IP 68  
 Temperature range: -25°C to +100°C (continuous)

## MAXInox Stainless Steel AISI 316L

Pg thread DIN 40 430

Stainless Steel AISI 316L	P	Fixing Hole (mm)	Ø A min-max (mm)	B Spanner (mm)	E (mm)	C (mm)	L min-max (mm)	Quantity Box/Bag
7900A.07	Pg 7	12,5	3 - 7	16	18	5,0	16-20	60/20
7900A.09	Pg 9	15,5	4 - 8	17	19	6,0	17-23	60/20
7900A.11	Pg11	19,0	4,5-10	20	23	6,0	20-25	100/20
7900A.13	Pg13,5	20,5	5 -12	22	25	6,5	20-26	100/20
7900A.16	Pg16	22,5	7 -13	24	27	6,5	20-27	40/20
7900A.21	Pg21	29,0	10 -17	30	33	7,0	24-30	60/15
7900A.29	Pg29	37,0	17 -25	40	45	8,0	30-37	20/10
7900A.36	Pg36	47,0	20 -32	50	55	8,0	38-48	7
7900A.42	Pg42	54,0	28 -38	57	63	10,0	36-46	5
7900A.48	Pg48	60,0	34 -45	67	74	15,0	40-52	5

