


INDUSTRIAL APPLICATION  
**HT-TC051**

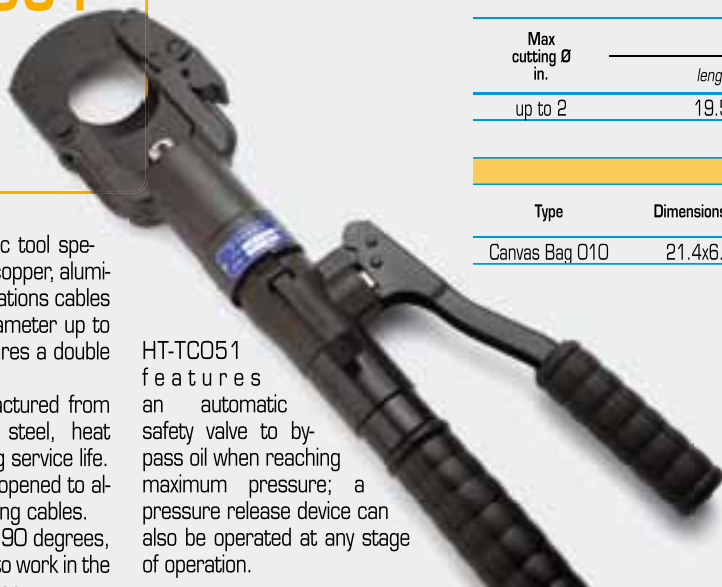

Hand operated hydraulic tool specifically designed to cut copper, aluminum and telecommunications cables having a max overall diameter up to 2 inches. The tool features a double speed action.

The blades are manufactured from high strength special steel, heat treated to ensure a long service life. The head can be easily opened to allow the cutting of running cables. The head can rotate by 90 degrees, to enable the operator to work in the most comfortable position.

HT-TC051 features an automatic safety valve to bypass oil when reaching maximum pressure; a pressure release device can also be operated at any stage of operation.

**HYDRAULIC CUTTING TOOL**

*general features*

Max cutting Ø in.	Dimensions in.		Weight lbs.
	length	width	
up to 2	19.5	5.1	9.6

STORAGE				
Type	Dimensions in.	Weight lbs	Supplied with the tool	Available upon request
Canvas Bag 010	21.4x6.3	0.3	✳	—



**Do not cut steel reinforced conductors**

INDUSTRIAL APPLICATION  
**TC 050**



Hydraulic cutting head complete with quick automatic coupler for connection to a hydraulic pump with a working pressure of 10,000 psi max, (see pages 148-150). TC050 features the same cutting capability as HT-TC051.

**HYDRAULIC CUTTING HEAD**

*general features*




Max cutting Ø in.	Max operating pressure psi	Dimensions in.		Weight lbs.
		length	width	
up to 2	10,000	12.8	4.4	7

STORAGE				
Type	Dimensions in.	Weight lbs	Supplied with the tool	Available upon request
Canvas bag 011	14.2x5.4	0.3	✳	—



**Do not cut steel reinforced conductors**

INDUSTRIAL APPLICATION  
**HT-TC065**

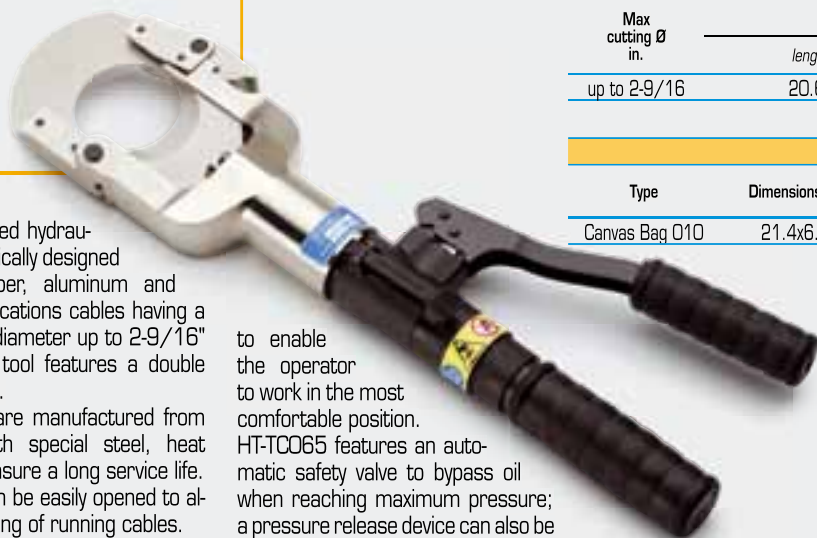

Hand operated hydraulic tool specifically designed to cut copper, aluminum and telecommunications cables having a max overall diameter up to 2-9/16" inches. The tool features a double speed action.

The blades are manufactured from high strength special steel, heat treated to ensure a long service life. The head can be easily opened to allow the cutting of running cables. The head can rotate by 320 degrees, to enable the operator to work in the most comfortable position.

HT-TC065 features an automatic safety valve to bypass oil when reaching maximum pressure; a pressure release device can also be operated at any stage of operation.

**HYDRAULIC CUTTING TOOL**

*general features*

Max cutting Ø in.	Dimensions in.		Weight lbs.
	length	width	
up to 2-9/16	20.6	5.1	11.6

STORAGE				
Type	Dimensions in.	Weight lbs	Supplied with the tool	Available upon request
Canvas Bag 010	21.4x6.3	0.3	✳	—



**Do not cut steel reinforced conductors**