


## CABLE TAGS MG-TPMF

*precut 4mm push in markers, for PMF holders*

SerieFLAT MG-TPMF tags are used for marking cables, conduit, tubes, conductors and components. Presented in stem format, tags are simply snapped off their stems and inserted into the appropriate holders. Consult us for other colours.

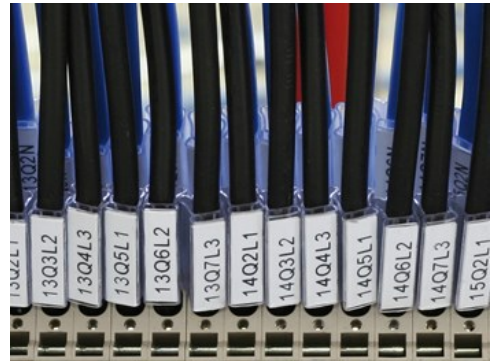

CERTIFICATES 

 2011/65/EU

LABORATORY TEST 

### **CEI EN 60950-1**

#### **INDELIBILITY**

#### **Information technology equipment - Safety**

*Part 1: General requirements*

*§ 1.7.11 Durability*

Compliance is checked by inspection and by rubbing the marking by hand for 15 s with a piece of cloth soaked with water and again for 15 s with a piece of cloth soaked with hexane.

After this test, the marking shall be legible; it shall not be possible to remove marking plates easily and they shall show no curling.

### **CEI EN 61010-1**

#### **INDELIBILITY**

**Ed.2 equivalent to VDE 0411-1**

#### **Safety indications for electric devices for measurement, control and laboratory use**

*Part 1: General indications*

This regulation requires that both material and the print shall withstand, cleaning with chemical agents commonly used in industry.

By rubbing manually by hand, without excessive pressure, for 30 seconds with a cloth soaked in the specific detergent or, if not specified, Isopropyl Alcohol.

---

## **CEMBRE STANDARD**

### **INDELIBILITY**

This test was created to simulate cleaning with chemical products commonly used on various surfaces.

By wiping with a cloth soaked in 95% Ethanol 30 times and making a visual inspection after every 10 passes.

---







## **DIN 30643**

---

# CABLE TAGS MG-TPMF

## *Technical characteristics*

Geometric shape	rectangular easy entry
Precut	yes
Silicon free	yes

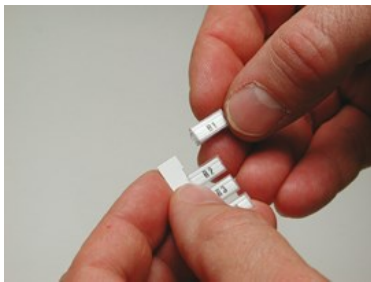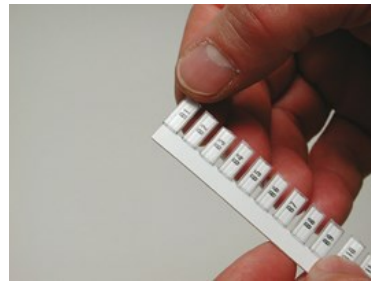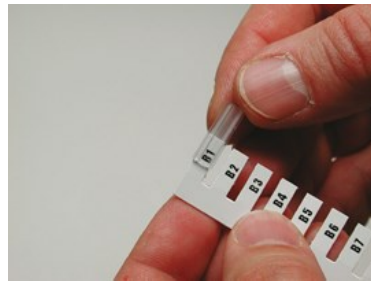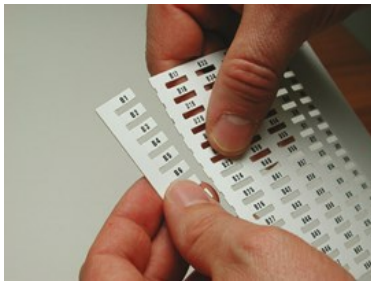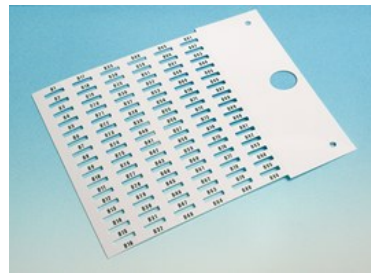

## CABLE TAGS **MG-TPMF**

*List of products*

## MG-TPMF

Material

UL94 class

Min operating temperature range

Max operating temperature range

Rigid PVC

V0

-30 °C

60 °C

Type	Colour	Height	Length	Quantity per sheet	Pack qty	SWcode
MG-TPMF 42090B	White	4 mm	10 mm	112	5,600	502
MG-TPMF 42040B	Yellow	4 mm	10 mm	112	5,600	502
MG-TPMF 42000BGY	Grey	4 mm	10 mm	112	5,600	502
MG-TPMF 42020B	Red	4 mm	10 mm	112	5,600	502
MG-TPMF 42030N	Orange	4 mm	10 mm	112	5,600	502
MG-TPMF 42060B	Blue	4 mm	10 mm	112	5,600	502
MG-TPMF 42080N	White	4 mm	10 mm	112	5,600	502
MG-TPMF 42050B	Green	4 mm	10 mm	112	5,600	502
MG-TPMF 42010B	Black	4 mm	10 mm	112	5,600	502
MG-TPMF 42091B	White	4 mm	12 mm	80	4,000	505
MG-TPMF 42041B	Yellow	4 mm	12 mm	80	4,000	505
MG-TPMF 42001BGY	Grey	4 mm	12 mm	80	4,000	505
MG-TPMF 42021B	Red	4 mm	12 mm	80	4,000	505
MG-TPMF 42061B	Blue	4 mm	12 mm	80	4,000	505
MG-TPMF 42051B	Green	4 mm	12 mm	80	4,000	505
MG-TPMF 42011B	Black	4 mm	12 mm	80	4,000	505
MG-TPMF 42092B	White	4 mm	15 mm	80	4,000	503
MG-TPMF 42042B	Yellow	4 mm	15 mm	80	4,000	503
MG-TPMF 42093B	White	4 mm	20 mm	64	1,600	504
MG-TPMF 42043B	Yellow	4 mm	20 mm	64	1,600	504
MG-TPMF 42023B	Red	4 mm	20 mm	64	1,600	504
MG-TPMF 42063B	Blue	4 mm	20 mm	64	1,600	504
MG-TPMF 42053B	Green	4 mm	20 mm	64	1,600	504
MG-TPMF 42096B	White	4 mm	30 mm	48	1,200	509
MG-TPMF 42046B	Yellow	4 mm	30 mm	48	1,200	509
MG-TPMF 42026B	Red	4 mm	30 mm	48	1,200	509
MG-TPMF 42066B	Blue	4 mm	30 mm	48	1,200	509
MG-TPMF 42056B	Green	4 mm	30 mm	48	1,200	509
MG-TPMF 42097B	White	4 mm	40 mm	32	800	508
MG-TPMF 42047B	Yellow	4 mm	40 mm	32	800	508

## MG-TPMF-HF

Material	Polycarbonate
UL94 class	V0
Halogen Free	yes
Min operating temperature range	-40 °C
Max operating temperature range	130 °C

Type	Colour	Height	Length	Quantity per sheet	Pack qty	SWcode
MG-TPMF 42090B-HF	White	4 mm	10 mm	112	5,600	502
MG-TPMF 42040B-HF	Yellow	4 mm	10 mm	112	5,600	502
MG-TPMF 42000B-HF	Metallic grey	4 mm	10 mm	112	5,600	502
MG-TPMF 42070B-HF	Brown	4 mm	10 mm	112	5,600	502
MG-TPMF 42030N-HF	Orange	4 mm	10 mm	112	5,600	502
MG-TPMF 42091B-HF	White	4 mm	12 mm	80	4,000	505
MG-TPMF 42041B-HF	Yellow	4 mm	12 mm	80	4,000	505
MG-TPMF 42001B-HF	Metallic grey	4 mm	12 mm	80	4,000	505
MG-TPMF 42092B-HF	White	4 mm	15 mm	80	4,000	503
MG-TPMF 42042B-HF	Yellow	4 mm	15 mm	80	4,000	503
MG-TPMF 42002B-HF	Metallic grey	4 mm	15 mm	80	4,000	503
MG-TPMF 42093-HF	White	4 mm	20 mm	64	1,600	504
MG-TPMF 42043-HF	Yellow	4 mm	20 mm	64	1,600	504
MG-TPMF 42096-HF	White	4 mm	30 mm	48	1,200	509
MG-TPMF 42046-HF	Yellow	4 mm	30 mm	48	1,200	509
MG-TPMF 42097B-HF	White	4 mm	40 mm	32	800	508
MG-TPMF 42047B-HF	Yellow	4 mm	40 mm	32	800	508