

WRAPAROUND CABLE MARKERS MG-KMP

self adhesive, precut

MG-KMP wraparound cable markers are suitable for identifying large diameter cables, tubes and conduit. MARKINGenius® printing is exceptionally clear and legible and is protected from chemical and atmospheric agents.



CERTIFICATES 

 2011/65/EU

LABORATORY TEST 

CEI EN 60464-2

RESISTANCE TO SOLVENT VAPOUR

Resistance to solvent vapour is verified by the condition of the test sample following exposure

The standard requires the sample to be placed in a container of the specified solvent.

The test samples must be suspended vertically with the lower edge around 150 mm above the surface of the test solvent. During the exposure, the liquid must not evaporate completely and, if necessary, must be topped up.

The temperature of the test solvent must be 23 ± 2 °C and the duration of exposure must be $168\text{h} \pm 1$ (seven days).



After removal from the container, each test sample must be examined to determine whether there has been any change in appearance, loss of adherence of the sub layer, exfoliation, detachment, bulging or other signs of deterioration.

The solvents used by Cembre for this test are: Acetone, Ethanol, Hexane

WRAPAROUND CABLE MARKERS MG-KMP

Technical characteristics

Material	PVC film
Silicon free	yes
Precut	yes
Adhesive	yes
Geometric shape	rectangular with square corners
Min operating temperature range	-30 °C
Max operating temperature range	70 °C
Min application temperature	10 °C
Max application temperature	40 °C

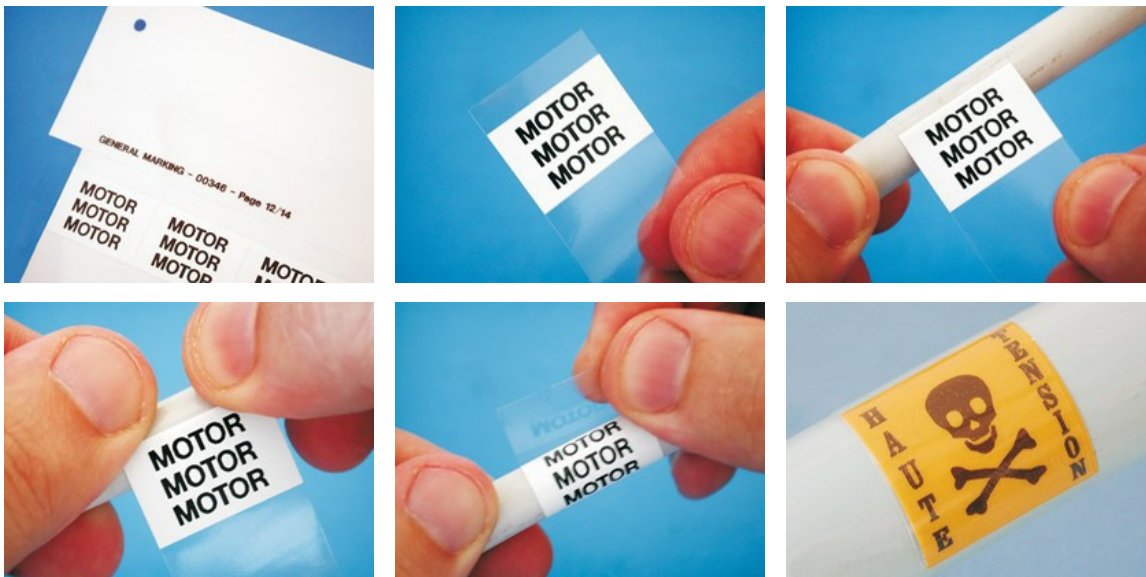

WRAPAROUND CABLE MARKERS MG-KMP

List of products


MG-KMP038

Minimum outside diameter

4.3 mm

Maximum outside diameter

7 mm



Type	Colour	C	A	B	Quantity per sheet	Pack qty	SWcode
MG-KMP038 48950-015	White	10 mm	38 mm	15 mm	12	600	301
MG-KMP038 48950-023	White	10 mm	38 mm	23 mm	8	400	302
MG-KMP038 48450-015	Yellow	10 mm	38 mm	15 mm	12	600	301
MG-KMP038 48450-023	Yellow	10 mm	38 mm	23 mm	8	400	302

MG-KMP050

Minimum outside diameter

6 mm

Maximum outside diameter

10 mm



Type	Colour	C	A	B	Quantity per sheet	Pack qty	SWcode
MG-KMP050 48951-015	White	15 mm	50 mm	15 mm	12	600	303
MG-KMP050 48951-023	White	15 mm	50 mm	23 mm	8	400	304
MG-KMP050 48451-015	Yellow	15 mm	50 mm	15 mm	12	600	303
MG-KMP050 48451-023	Yellow	15 mm	50 mm	23 mm	8	400	304

MG-KMP075

Minimum outside diameter

8 mm

Maximum outside diameter

14 mm



Type	Colour	C	A	B	Quantity per sheet	Pack qty	SWcode
MG-KMP075 48952-015	White	25 mm	75 mm	15 mm	6	300	305
MG-KMP075 48952-023	White	25 mm	75 mm	23 mm	4	200	306
MG-KMP075 48452-015	Yellow	25 mm	75 mm	15 mm	6	300	305
MG-KMP075 48452-023	Yellow	25 mm	75 mm	23 mm	4	200	306


MG-KMP100

Minimum outside diameter

12 mm

Maximum outside diameter

20 mm



Type	Colour	C	A	B	Quantity per sheet	Pack qty	SWcode
MG-KMP100 48953-015	White	25 mm	100 mm	15 mm	6	300	310
MG-KMP100 48953-023	White	25 mm	100 mm	23 mm	4	200	311
MG-KMP100 48453-015	Yellow	25 mm	100 mm	15 mm	6	300	310
MG-KMP100 48453-023	Yellow	25 mm	100 mm	23 mm	4	200	311


MG-KMP135

Minimum outside diameter

20 mm

Maximum outside diameter

25 mm



Type	Colour	C	A	B	Quantity per sheet	Pack qty	SWcode
MG-KMP135 48955-050	White	50 mm	135 mm	50 mm	2	100	312