

TRANSPARENT LEGENDS MG-TAP-CCS

15mm precut, for legend bases

MG-TAP-CCS transparent legends may be printed or used as protective covers for MG-TAP or TAP legends, PT and PL type legend bases and RT-TAP rail.



CERTIFICATES 

 2011/65/EU

LABORATORY TEST 

CEI EN 60950-1

INDELIBILITY

Information technology equipment - Safety

Part 1: General requirements

§ 1.7.11 Durability

Compliance is checked by inspection and by rubbing the marking by hand for 15 s with a piece of cloth soaked with water and again for 15 s with a piece of cloth soaked with hexane.

After this test, the marking shall be legible; it shall not be possible to remove marking plates easily and they shall show no curling.

CEI EN 61010-1

INDELIBILITY

Ed.2 equivalent to VDE 0411-1

Safety indications for electric devices for measurement, control and laboratory use

Part 1: General indications

This regulation requires that both material and the print shall withstand, cleaning with chemical agents commonly used in industry.

By rubbing manually by hand, without excessive pressure, for 30 seconds with a cloth soaked in the specific detergent or, if not specified, Isopropyl Alcohol.

CEMBRE STANDARD

INDELIBILITY

This test was created to simulate cleaning with chemical products commonly used on various surfaces.

By wiping with a cloth soaked in 95% Ethanol 30 times and making a visual inspection after every 10 passes.

UNI EN ISO 175

EFFECT OF IMMERSION IN LIQUID CHEMICALS

The standard specifies methods for exposing plastic test samples to liquid chemical agents and for determining changes in characteristics caused by this exposure. It includes the immersion test for 24 hours of the entire surface of the test sample and applies to all solid plastic materials, submitted in the form of printed or extruded materials, plates, pipes, bars or sheets with a thickness greater than 0.1 mm.

The test samples are completely immersed in a test liquid for a specified time and temperature.

Their characteristics are determined before immersion, after removal from the liquid and after drying.

The test methods specified are the following:


- > Changes in mass, dimensions and appearance, immediately after removal from the liquid and after drying
- > Change in the physical characteristics (mechanical, thermal, optical, etc.) immediately after removal from the liquid and after drying
- > The quantity of liquid absorbed

The liquids used by Cembre for this test are: Hydrochloric acid, Nitric acid, Hydrofluoric acid

TRANSPARENT LEGENDS MG-TAP-CCS

Technical characteristics

Material	Plasticised transparent PVC
UL94 class	V0
Min operating temperature range	-30 °C
Max operating temperature range	60 °C
Geometric shape	rectangular with square corners
Precut	yes

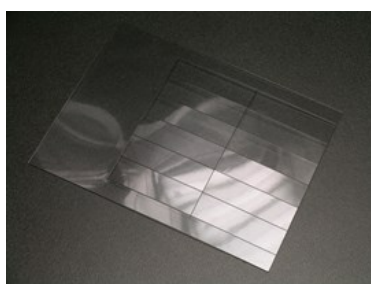

TRANSPARENT LEGENDS **MG-TAP-CCS**

List of products

MG-TAP-CCS						
Type	Colour	Height	Length	Quantity per sheet	Pack qty	SWcode
MG-TAP-CCS 990514	Transparent	15 mm	67 mm	6	300	168
MG-TAP-CCS 990508N	Transparent	15 mm	17 mm	42	1,050	165
MG-TAP-CCS 990510N	Transparent	15 mm	27 mm	28	1,400	166
MG-TAP-CCS 990499	Transparent	17.5 mm	27.8 mm	24	1,200	175
MG-TAP-CCS 990513N	Transparent	15 mm	49 mm	14	700	167