


LEGENDS MG-TAPW

9mm precut

MG-TAPW legends are used, with legend holders or legend rails, to identify a wide range of cables and components. Consult us for availability of other colours.

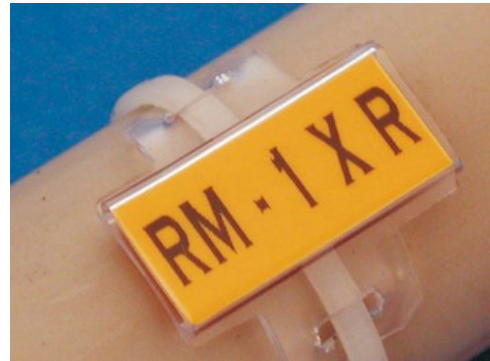

CERTIFICATES 

 2011/65/EU

LABORATORY TEST 

CEI EN 60950-1

INDELIBILITY

Information technology equipment - Safety

Part 1: General requirements

§ 1.7.11 Durability

Compliance is checked by inspection and by rubbing the marking by hand for 15 s with a piece of cloth soaked with water and again for 15 s with a piece of cloth soaked with hexane.

After this test, the marking shall be legible; it shall not be possible to remove marking plates easily and they shall show no curling.

CEI EN 61010-1

INDELIBILITY

Ed.2 equivalent to VDE 0411-1

Safety indications for electric devices for measurement, control and laboratory use

Part 1: General indications

This regulation requires that both material and the print shall withstand, cleaning with chemical agents commonly used in industry.

By rubbing manually by hand, without excessive pressure, for 30 seconds with a cloth soaked in the specific detergent or, if not specified, Isopropyl Alcohol.

CEMBRE STANDARD

INDELIBILITY

This test was created to simulate cleaning with chemical products commonly used on various surfaces.

By wiping with a cloth soaked in 95% Ethanol 30 times and making a visual inspection after every 10 passes.

DIN 30643

LEGENDS MG-TAPW

Technical characteristics

Geometric shape	rectangular with square corners
Precut	yes
Silicon free	yes



LEGENDS MG-TAPW

List of products

MG-TAPW.						
Material						Rigid PVC
UL94 class						V0
Min operating temperature range						-30 °C
Max operating temperature range						60 °C
Type	Colour	Height	Length	Quantity per sheet	Pack qty	SWcode
MG-TAPW 49092N	White	9 mm	12 mm	88	2,200	360
MG-TAPW 49042N	Yellow	9 mm	12 mm	88	2,200	360
MG-TAPW 49093N	White	9 mm	15 mm	77	1,925	361
MG-TAPW 49043N	Yellow	9 mm	15 mm	77	1,925	361
MG-TAPW 49053N	Green	9 mm	15 mm	77	1,925	361
MG-TAPW 49090N	White	9 mm	20 mm	55	2,750	362
MG-TAPW 49040N	Yellow	9 mm	20 mm	55	2,750	362
MG-TAPW 49096	White	9 mm	29 mm	30	1,500	363
MG-TAPW 49046	Yellow	9 mm	29 mm	30	1,500	363
MG-TAPW 49066	Blue	9 mm	29 mm	30	1,500	363
MG-TAPW 49091N	White	9 mm	35 mm	33	1,650	364
MG-TAPW 49041N	Yellow	9 mm	35 mm	33	1,650	364
MG-TAPW 49094	White	9 mm	50 mm	20	1,000	376
MG-TAPW 49044	Yellow	9 mm	50 mm	20	1,000	376
MG-TAPW 49095	White	9 mm	70 mm	10	500	378
MG-TAPW 49045	Yellow	9 mm	70 mm	10	500	378
MG-TAPW 49055	Green	9 mm	70 mm	10	500	378

MG-TAPW-HF						
Material						Polycarbonate
UL94 class						V0
Halogen Free						yes
Min operating temperature range						-40 °C
Max operating temperature range						130 °C
Type	Colour	Height	Length	Quantity per sheet	Pack qty	SWcode
MG-TAPW 49091N-HF	White	9 mm	35 mm	33	1,650	364
MG-TAPW 49094-HF	White	9 mm	50 mm	20	1,000	376