



LABELS MG-VCT

self adhesive, precut

Dielectric labels with permanent adhesive backing and increased resistance to ageing. Their flexibility and strength make them particularly suitable for marking curved surfaces.

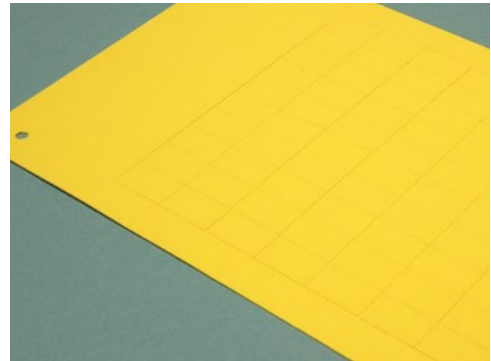

CERTIFICATES 

 2011/65/EU


LABORATORY TEST 

DIN 30643

LABELS MG-VCT

Technical characteristics

Material	PVC coated fabric
Geometric shape	rectangular with square corners
Min operating temperature range	-40 °C
Max operating temperature range	150 °C
Min application temperature	10 °C
Max application temperature	40 °C
Precut	yes
Adhesive	yes

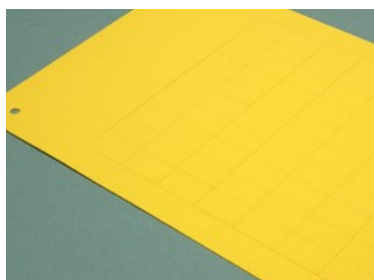

LABELS MG-VCT

List of products

MG-VCT						
Type	Colour	Height	Length	Quantity per sheet	Pack qty	SWcode
MG-VCT 48014	White	9 mm	12 mm	80	4,000	160
MG-VCT 48041	Yellow	7 mm	10 mm	120	6,000	191
MG-VCT 48040	Yellow	6 mm	15 mm	105	5,250	181
MG-VCT 48045	Yellow	9 mm	15 mm	70	3,500	161
MG-VCT 48046N	Yellow	9 mm	20 mm	55	2,750	162
MG-VCT 48047	Yellow	11 mm	38 mm	27	1,350	184
MG-VCT 48091	White	7 mm	10 mm	120	6,000	191
MG-VCT 48090	White	6 mm	15 mm	105	5,250	181
MG-VCT 48095	White	9 mm	15 mm	70	3,500	161
MG-VCT 48096N	White	9 mm	20 mm	55	2,750	162
MG-VCT 48097	White	11 mm	38 mm	27	1,350	184