


PLC LEGENDS MG-PLC

precut

Legends replace the strips supplied with the devices and automatically print at the correct spacing. Thickness of legend 12,7x50 mm: 0,2 mm.
Consult us for availability of other colours.



CERTIFICATES 

 2011/65/EU

LABORATORY TEST 

CEI EN 60950-1

INDELIBILITY

Information technology equipment - Safety

Part 1: General requirements

§ 1.7.11 Durability

Compliance is checked by inspection and by rubbing the marking by hand for 15 s with a piece of cloth soaked with water and again for 15 s with a piece of cloth soaked with hexane.

After this test, the marking shall be legible; it shall not be possible to remove marking plates easily and they shall show no curling.

CEI EN 61010-1

INDELIBILITY

Ed.2 equivalent to VDE 0411-1

Safety indications for electric devices for measurement, control and laboratory use

Part 1: General indications

This regulation requires that both material and the print shall withstand, cleaning with chemical agents commonly used in industry.

By rubbing manually by hand, without excessive pressure, for 30 seconds with a cloth soaked in the specific detergent or, if not specified, Isopropyl Alcohol.

CEMBRE STANDARD

INDELIBILITY

This test was created to simulate cleaning with chemical products commonly used on various surfaces.


By wiping with a cloth soaked in 95% Ethanol 30 times and making a visual inspection after every 10 passes.

DIN 30643

PLC LEGENDS MG-PLC

Technical characteristics

Geometric shape	rectangular with square corners
Precut	yes

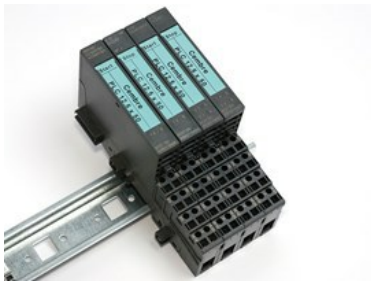

PLC LEGENDS MG-PLC

List of products

MG-PLC.							
Material							Rigid PVC
UL94 class							V0
Max application temperature							60 °C
Min application temperature							-30 °C
Type	Colour	Height	Length	Thickness	Quantity per sheet	Pack qty	SWcode
MG-PLC 71090	White	17.5 mm	103.5 mm	0.5 mm	6	60	882
MG-PLC 71040	Yellow	17.5 mm	103.5 mm	0.5 mm	6	60	882
MG-PLC 71050	Siemens green	17.5 mm	103.5 mm	0.5 mm	6	60	882
MG-PLC 71047	Yellow	22 mm	38 mm	0.5 mm	10	100	904
MG-PLC 71091	White	22.75 mm	103.5 mm	0.5 mm	4	40	883
MG-PLC 71041	Yellow	22.75 mm	103.5 mm	0.5 mm	4	40	883
MG-PLC 71051	Siemens green	22.75 mm	103.5 mm	0.5 mm	4	40	883
MG-PLC 71001-HF	Metallic grey	22.75 mm	103.5 mm	0.5 mm	4	40	883
MG-PLC 71092	White	12.7 mm	50 mm	0.3 mm	14	140	885
MG-PLC 71042	Yellow	12.7 mm	50 mm	0.3 mm	14	140	885
MG-PLC 71052	Siemens green	12.7 mm	50 mm	0.2 mm	14	140	885
MG-PLC 71002GY	Grey	12.7 mm	50 mm	0.3 mm	14	140	885
MG-PLC 71094	White	25.6 mm	50 mm	0.3 mm	8	80	895
MG-PLC 71044	Yellow	25.6 mm	50 mm	0.3 mm	8	80	895
MG-PLC 71099	White	12.7 mm	109 mm	0.3 mm	8	80	897
MG-PLC 71049	Yellow	12.7 mm	109 mm	0.3 mm	8	80	897
MG-PLC 71059	Siemens green	12.7 mm	109 mm	0.3 mm	8	80	897
MG-PLC 71009GY	Grey	12.7 mm	109 mm	0.3 mm	8	80	897
MG-PLC 71096	White	22.75 mm	109 mm	0.5 mm	4	40	896
MG-PLC 71046	Yellow	22.75 mm	109 mm	0.5 mm	4	40	896
MG-PLC 71056	Siemens green	22.75 mm	109 mm	0.5 mm	4	40	896
MG-PLC 71098	White	12.7 mm	31 mm	0.3 mm	21	210	900
MG-PLC 71048	Yellow	12.7 mm	31 mm	0.3 mm	21	210	900
MG-PLC 71058	Siemens green	12.7 mm	31 mm	0.3 mm	21	210	900
MG-PLC 71008GY	Grey	12.7 mm	31 mm	0.3 mm	21	210	900
MG-PLC 71053	Siemens green	52 mm	80 mm	0.3 mm	2	20	889

MG-PLC-HF

Material	Polycarbonate
UL94 class	V0
Halogen Free	yes
Max operating temperature range	130 °C
Min operating temperature range	-40 °C

Type	Colour	Height	Length	Thickness	Quantity per sheet	Pack qty	SWcode
MG-PLC 71000-HF	Metallic grey	17.5 mm	103.5 mm	0.5 mm	6	60	882
MG-PLC 71001-HF	Metallic grey	22.75 mm	103.5 mm	0.5 mm	4	40	883