


## MODULAR LEGENDS AND LABELS MG-17.5

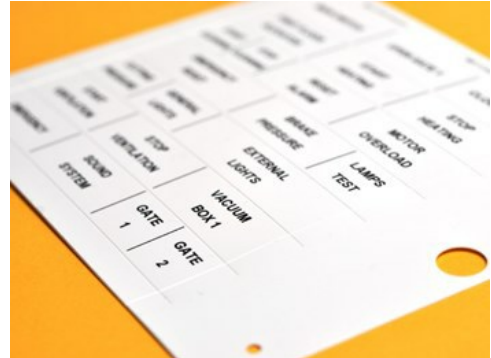

LABORATORY TEST 

**DIN 30643**

# MODULAR LEGENDS AND LABELS MG-17.5

## *Technical characteristics*

Geometric shape	rectangular with square corners
Precut	yes
Min application temperature	10 °C
Max application temperature	40 °C



# MODULAR LEGENDS AND LABELS MG-17.5

## List of products

<b>MG-17.5-R</b>							
Material							Rigid PVC
UL94 class							V0
Silicon free							yes
Min operating temperature range							-30 °C
Max operating temperature range							60 °C
Type	Height	Length	Quantity per sheet	No. modules	Pack qty	SWcode	Colour
MG-17.5-R 990798N	15 mm	107.5 mm	7	6	350	329	White
MG-17.5-R 990799N	15 mm	107.5 mm	7	6	350	329	Yellow
MG-17.5-R 990809NGY	15 mm	107.5 mm	7	6	350	329	Grey
MG-17.5-R 990846	15 mm	107.5 mm	7	6	350	329	Red
MG-17.5-R 990847	15 mm	107.5 mm	7	6	350	329	Blue
MG-17.5-R 990755	15 mm	87.5 mm	6	5	300	325	White
MG-17.5-R 990761	15 mm	87.5 mm	6	5	300	325	Yellow
MG-17.5-R 990781GY	15 mm	87.5 mm	6	5	300	325	Grey
MG-17.5-R 990762	15 mm	70 mm	6	4	300	324	White
MG-17.5-R 990763	15 mm	70 mm	6	4	300	324	Yellow
MG-17.5-R 990782GY	15 mm	70 mm	6	4	300	324	Grey
MG-17.5-R 990764N	15 mm	52.5 mm	12	3	700	323	White
MG-17.5-R 990765N	15 mm	52.5 mm	12	3	700	323	Yellow
MG-17.5-R 990783NGY	15 mm	52.5 mm	12	3	700	323	Grey
MG-17.5-R 990766N	15 mm	35 mm	21	2	1,050	322	White
MG-17.5-R 990767N	15 mm	35 mm	21	2	1,050	322	Yellow
MG-17.5-R 990784NGY	15 mm	35 mm	21	2	1,050	322	Grey
MG-17.5-R 990768N	15 mm	17.5 mm	42	1	1,050	321	White
MG-17.5-R 990769N	15 mm	17.5 mm	36	1	1,050	321	Yellow
MG-17.5-R 990785NGY	15 mm	17.5 mm	36	1	1,050	321	Grey
MG-17.5-R 990788N	12 mm	105 mm	8	6	400	332	White
MG-17.5-R 990889	25 mm	18 mm	24	1	1,200	335	White
MG-17.5-R 990895	25 mm	18 mm	24	1	1,200	335	Yellow
MG-17.5-R 990900	25 mm	18 mm	24	1	1,200	335	Red
MG-17.5-R 990914	25 mm	18 mm	24	1	1,200	335	Black
MG-17.5-R 990950	37.5 mm	17.5 mm	18	1	900	345	White

MG-17.5-R 990951	37.5 mm	17.5 mm	18	1	900	345	Yellow
MG-17.5-R 990952	37.5 mm	17.5 mm	18	1	900	345	Red
MG-17.5-R 990953	37.5 mm	17.5 mm	18	1	900	345	Black
MG-17.5-R 990891	25 mm	27 mm	16	1,5	800	334	White
MG-17.5-R 990892	25 mm	27 mm	16	1,5	800	334	Yellow
MG-17.5-R 990897	25 mm	27 mm	16	1,5	800	334	Red
MG-17.5-R 990915	25 mm	27 mm	16	1,5	800	334	Black
MG-17.5-R 990888	25 mm	36 mm	12	2	600	336	White
MG-17.5-R 990894	25 mm	36 mm	12	2	600	336	Yellow
MG-17.5-R 990899	25 mm	36 mm	12	2	600	336	Red
MG-17.5-R 990916	25 mm	36 mm	12	2	600	336	Black
MG-17.5-R 990887	25 mm	50 mm	8	3	400	337	White
MG-17.5-R 990893	25 mm	50 mm	8	3	400	337	Yellow
MG-17.5-R 990898	25 mm	50 mm	8	3	400	337	Red
MG-17.5-R 990917	25 mm	50 mm	8	3	400	337	Black
MG-17.5-R 990890	25 mm	70 mm	4	4	200	338	White
MG-17.5-R 990896	25 mm	70 mm	4	4	200	338	Yellow
MG-17.5-R 990901	25 mm	70 mm	4	4	200	338	Red
MG-17.5-R 990918	25 mm	70 mm	4	4	200	338	Black

## MG2-17.5-R

Material

UL94 class

Silicon free

Min operating temperature range

Max operating temperature range

Rigid PVC

V0

yes

-30 °C

60 °C

Type	Colour	No. modules	Height	Length	Quantity per sheet	Pack qty	SWcode
MG2-17.5-R 990883	White	8	15 mm	140 mm	7	350	331
MG2-17.5-R 990884	Yellow	8	15 mm	140 mm	7	350	331

## MG-17.5-R-HF

Material	Polycarbonate
UL94 class	V0
Halogen Free	yes
Silicon free	yes
Min operating temperature range	-40 °C
Max operating temperature range	130 °C

Type	Colour	No. modules	Height	Length	Quantity per sheet	Pack qty	SWcode
MG-17.5-R 990784N-HF	Metallic grey	2	15 mm	35 mm	21	1,050	322
MG-17.5-R 990783N-HF	Metallic grey	3	15 mm	52.5 mm	14	700	323
MG-17.5-R 990782-HF	Metallic grey	4	15 mm	70 mm	6	300	324
MG-17.5-R 990781-HF	Metallic grey	5	15 mm	87.5 mm	6	300	325
MG-17.5-R 990785N-HF	Metallic grey	1	15 mm	17.5 mm	42	1,050	321

## MG-17.5-A

Material	Rigid PVC
UL94 class	V0
Silicon free	yes
Adhesive	yes
Min operating temperature range	-30 °C
Max operating temperature range	60 °C

Type	Colour	No. modules	Height	Length	Quantity per sheet	Pack qty	SWcode
MG-17.5-A 990824	White	6	15 mm	107.5 mm	7	350	929
MG-17.5-A 990826	Yellow	6	15 mm	107.5 mm	7	350	929
MG-17.5-A 990827NGY	Grey	6	15 mm	107.5 mm	7	350	929
MG-17.5-A 990929	Red	6	15 mm	107.5 mm	7	350	929
MG-17.5-A 990926	Blue	6	15 mm	107.5 mm	7	350	929
MG-17.5-A 990925	Green	6	15 mm	107.5 mm	7	350	929
MG-17.5-A 990833N	Black	6	15 mm	107.5 mm	7	350	929
MG-17.5-A 990753N	White	2	15 mm	35 mm	21	525	922
MG-17.5-A 990820N	Yellow	2	15 mm	35 mm	21	525	922
MG-17.5-A 990822NGY	Grey	2	15 mm	35 mm	21	525	922
MG-17.5-A 990923N	Red	2	15 mm	35 mm	21	525	922
MG-17.5-A 990963N	Blue	2	15 mm	35 mm	21	525	922
MG-17.5-A 990954N	Green	2	15 mm	35 mm	21	525	922
MG-17.5-A 990913N	Black	2	15 mm	35 mm	21	525	922
MG-17.5-A 990869	White	1	25 mm	18 mm	24	1,200	935
MG-17.5-A 990878	Yellow	1	25 mm	18 mm	24	1,200	935
MG-17.5-A 990905	Red	1	25 mm	18 mm	24	1,200	935
MG-17.5-A 990919	Black	1	25 mm	18 mm	24	1,200	935
MG-17.5-A 990871	White	1.5	25 mm	27 mm	16	800	934

MG-17.5-A 990872	Yellow	1.5	25 mm	27 mm	16	800	934
MG-17.5-A 990902	Red	1.5	25 mm	27 mm	16	800	934
MG-17.5-A 990920	Black	1.5	25 mm	27 mm	16	800	934
MG-17.5-A 990868	White	2	25 mm	36 mm	12	600	936
MG-17.5-A 990877	Yellow	2	25 mm	36 mm	12	600	936
MG-17.5-A 990904	Red	2	25 mm	36 mm	12	600	936
MG-17.5-A 990970	Blue	2	25 mm	36 mm	12	600	936
MG-17.5-A 990921	Black	2	25 mm	36 mm	12	600	936
MG-17.5-A 990867	White	3	25 mm	50 mm	8	400	937
MG-17.5-A 990873	Yellow	3	25 mm	50 mm	8	400	937
MG-17.5-A 990903	Red	3	25 mm	50 mm	8	400	937
MG-17.5-A 990922	Black	3	25 mm	50 mm	8	400	937
MG-17.5-A 990870	White	4	25 mm	70 mm	4	200	938
MG-17.5-A 990879	Yellow	4	25 mm	70 mm	4	200	938
MG-17.5-A 990906	Red	4	25 mm	70 mm	4	200	938
MG-17.5-A 990924	Black	4	25 mm	70 mm	4	200	938
MG-17.5-A 990972		6	20 mm	107.5 mm	5	125	946

## MG2-17.5-A

Material

Rigid PVC

UL94 class

V0

Silicon free

yes

Adhesive

yes

Min operating temperature range

-30 °C

Max operating temperature range

60 °C

Type	Colour	No. modules	Height	Length	Quantity per sheet	Pack qty	SWcode
MG2-17.5-A 990880	White	8	15 mm	140 mm	7	350	931
MG2-17.5-A 990881	Yellow	8	15 mm	140 mm	7	350	931

## MG-17.5-A-HF

Material	Polycarbonate
UL94 class	V0
Halogen Free	yes
Silicon free	yes
Adhesive	yes
Min operating temperature range	-40 °C
Max operating temperature range	120 °C

Type	Height	Length	Quantity per sheet	No. modules	Pack qty	SWcode	Colour
MG-17.5-A 990822N-HF	15 mm	35 mm	21	2	525	922	Metallic grey
MG-17.5-A 990827N-HF	15 mm	107.5 mm	7	6	175	929	Metallic grey
MG2-17.5-A 990882-HF	15 mm	140 mm	5	8	125	931	Metallic grey
MG-17.5-A 990972-HF	20 mm	107.5 mm	7	6	175	946	

## MG-17.5-VY

Min operating temperature range	-40 °C
Max operating temperature range	80 °C
Material	PVC film
Adhesive	yes

Type	Height	Length	Quantity per sheet	No. modules	Pack qty	SWcode	Colour
MG-17.5-VY 990746N	15 mm	107.5 mm	7	6	350	570	White
MG-17.5-VY 990747N	15 mm	107.5 mm	7	6	350	570	Yellow

## MG-17.5-PY

Min operating temperature range	-40 °C
Max operating temperature range	140 °C
Material	Polyester film
Adhesive	yes

Type	Height	Length	Quantity per sheet	No. modules	Pack qty	SWcode	Colour
MG-17.5-PY 990777N	15 mm	107.5 mm	7	6	350	570	White
MG-17.5-PY 990779N	15 mm	107.5 mm	7	6	350	570	Metallic grey

## MG-17.5-SB

Min operating temperature range	-40 °C
Max operating temperature range	80 °C
Material	Rigid PVC

Type	Height	Length	Pack qty	Colour	Thickness
MG-17.5-SB 990752	15 mm	430 mm	10	White	0.1 mm
MG-17.5-SB 990756	15 mm	430 mm	10	Yellow	0.1 mm
MG-17.5-SB 990759	15 mm	430 mm	10	White	0.7 mm
MG-17.5-SB 990760	15 mm	430 mm	10	Yellow	0.7 mm
MG-17.5-SB 990757	15 mm	430 mm	10	White	0.5 mm
MG-17.5-SB 990758	15 mm	430 mm	10	Yellow	0.5 mm