

PANEL PLATES MG-VRT-R


rivet fixing, customisable

MG-VRT-R rigid PVC panel plates are used to create name plates, rating plates, data plates using company logos, technical data, serial numbers, EC certification, etc. CPT transparent Polycarbonate covers can be used for increased durability. Consult us for availability of other colours and transparent versions.

Note: UV resistance may vary between colours.



CERTIFICATES 

 2011/65/EU

LABORATORY TEST 

CEI EN 60950-1

INDELIBILITY

Information technology equipment - Safety

Part 1: General requirements

§ 1.7.11 Durability

Compliance is checked by inspection and by rubbing the marking by hand for 15 s with a piece of cloth soaked with water and again for 15 s with a piece of cloth soaked with hexane.

After this test, the marking shall be legible; it shall not be possible to remove marking plates easily and they shall show no curling.

CEI EN 61010-1

INDELIBILITY

Ed.2 equivalent to VDE 0411-1

Safety indications for electric devices for measurement, control and laboratory use

Part 1: General indications

This regulation requires that both material and the print shall withstand, cleaning with chemical agents commonly used in industry.

By rubbing manually by hand, without excessive pressure, for 30 seconds with a cloth soaked in the specific detergent or, if not specified, Isopropyl Alcohol.

CEMBRE STANDARD

INDELIBILITY

This test was created to simulate cleaning with chemical products commonly used on various surfaces.


By wiping with a cloth soaked in 95% Ethanol 30 times and making a visual inspection after every 10 passes.

DIN 30643

PANEL PLATES MG-VRT-R

Technical characteristics

Geometric shape	rectangular with square corners
Silicon free	yes
UL94 class	V0
Material	Rigid PVC
Rivet fixing	yes
Min operating temperature range	-30 °C
Max operating temperature range	60 °C
Min application temperature	10 °C
Max application temperature	40 °C

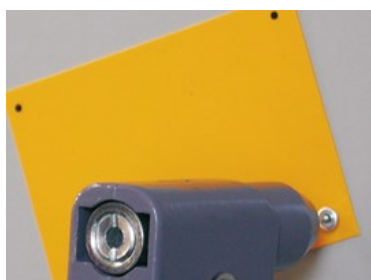

PANEL PLATES MG-VRT-R

List of products

MG-VRT-R						
Type	Height	Length	Quantity per sheet	Pack qty	SWcode	Colour
MG-VRT-R 48428	102 mm	138 mm	1	50	207	Yellow
MG-VRT-R 48728GY	102 mm	138 mm	1	50	207	Grey
MG-VRT-R 48228	102 mm	138 mm	1	50	207	Red
MG-VRT-R 48128	102 mm	138 mm	1	50	207	Black
MG-VRT-R 48297	50 mm	100 mm	2	50	844	Red
MG-VRT-R 48217	35 mm	100 mm	3	75	810	Red
MG-VRT-R 48908	25 mm	80 mm	4	200	861	White
MG-VRT-R 48408	25 mm	80 mm	4	200	861	Yellow
MG-VRT-R 48405	25 mm	100 mm	4	200	205	Yellow
MG-VRT-R 48929	30 mm	70 mm	3	150	820	White
MG-VRT-R 48918	50 mm	50 mm	1	200	858	White
MG-VRT-R 48418	50 mm	50 mm	1	200	858	Yellow
MG-VRT-R 48941	60 mm	100 mm	1	50	821	White
MG-VRT-R 48900N	32 mm	58 mm	6	300	200	White
MG-VRT-R 48400N	32 mm	58 mm	6	300	200	Yellow
MG-VRT-R 48700NGY	32 mm	58 mm	6	300	200	Grey
MG-VRT-R 48901	42 mm	78 mm	2	100	202	White
MG-VRT-R 48401	42 mm	78 mm	2	100	202	Yellow
MG-VRT-R 48701GY	42 mm	78 mm	2	100	202	Grey
MG-VRT-R 48917	35 mm	100 mm	3	75	810	White
MG-VRT-R 48417	35 mm	100 mm	3	75	810	Yellow
MG-VRT-R 48717GY	35 mm	100 mm	3	75	810	Grey
MG-VRT-R 48997	50 mm	100 mm	2	50	844	White
MG-VRT-R 48903	52 mm	107 mm	2	100	204	White
MG-VRT-R 48403	52 mm	107 mm	2	100	204	Yellow
MG-VRT-R 48703GY	52 mm	107 mm	2	100	204	Grey
MG-VRT-R 48223	52 mm	107 mm	2	100	204	Red
MG-VRT-R 48103	52 mm	107 mm	2	100	204	Black
MG-VRT-R 48902	62 mm	88 mm	1	50	203	White

MG-VRT-R 48402	62 mm	88 mm	1	50	203	Yellow
MG-VRT-R 48702GY	62 mm	88 mm	1	50	203	Grey
MG-VRT-R 48913	92 mm	118 mm	1	50	813	White
MG-VRT-R 48413	92 mm	118 mm	1	50	813	Yellow
MG-VRT-R 48713GY	92 mm	118 mm	1	50	813	Grey
MG-VRT-R 48213	92 mm	118 mm	1	50	813	Red
MG-VRT-R 48513	92 mm	118 mm	1	50	813	Green
MG-VRT-R 48113	92 mm	118 mm	1	50	813	Black
MG-VRT-R 48928	102 mm	138 mm	1	50	207	White