

PANEL PLATES MG-VRT-RH

rivet fixing, customisable

MG-VRT-RH rigid PVC panel plates are used to create name plates, rating plates, data plates using company logos, technical data, serial numbers, EC certification, etc.


CPT transparent Polycarbonate covers can be used for increased durability.

Consult us for availability of other colours and transparent versions.

Note: UV resistance may vary between colours.



CERTIFICATES 

 2011/65/EU

LABORATORY TEST 

CEI EN 60950-1

INDELIBILITY

Information technology equipment - Safety

Part 1: General requirements

§ 1.7.11 Durability

Compliance is checked by inspection and by rubbing the marking by hand for 15 s with a piece of cloth soaked with water and again for 15 s with a piece of cloth soaked with hexane.

After this test, the marking shall be legible; it shall not be possible to remove marking plates easily and they shall show no curling.

CEI EN 61010-1

INDELIBILITY

Ed.2 equivalent to VDE 0411-1

Safety indications for electric devices for measurement, control and laboratory use

Part 1: General indications

This regulation requires that both material and the print shall withstand, cleaning with chemical agents commonly used in industry.

By rubbing manually by hand, without excessive pressure, for 30 seconds with a cloth soaked in the specific detergent or, if not specified, Isopropyl Alcohol.

CEMBRE STANDARD

INDELIBILITY

This test was created to simulate cleaning with chemical products commonly used on various surfaces.


By wiping with a cloth soaked in 95% Ethanol 30 times and making a visual inspection after every 10 passes.

DIN 30643

PANEL PLATES MG-VRT-RH

Technical characteristics

Geometric shape	rectangular with square corners
Silicon free	yes
UL94 class	V0
Material	Rigid PVC
Rivet fixing	yes
Min operating temperature range	-30 °C
Max operating temperature range	60 °C
Min application temperature	10 °C
Max application temperature	40 °C

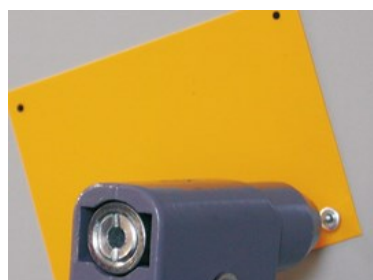

PANEL PLATES MG-VRT-RH

List of products

MG-VRT-RH							
Type	Height	Length	No. hole	Quantity per sheet	Pack qty	SWcode	Colour
MG-VRT-RH 48919	50 mm	140 mm	4	2	50	872	White
MG-VRT-RH 48927	60 mm	100 mm	4	2	50	842	White
MG-VRT-RH 48921	82 mm	142 mm	2	2	50	836	White
MG-VRT-RH 48421	82 mm	142 mm	2	1	50	836	Yellow
MG-VRT-RH 48924	15 mm	52 mm	2	14	350	831	White
MG-VRT-RH 48129	15 mm	52 mm	2	14	350	831	Black
MG-VRT-RH 48438	15 mm	80 mm	2	7	175	828	Yellow
MG-VRT-RH 48906	25 mm	50 mm	2	8	200	860	White
MG-VRT-RH 48406	25 mm	50 mm	2	8	200	860	Yellow
MG-VRT-RH 48806GY	25 mm	50 mm	2	8	200	860	Grey
MG-VRT-RH 48907	25 mm	75 mm	2	4	100	809	White
MG-VRT-RH 48407	25 mm	75 mm	2	4	100	809	Yellow
MG-VRT-RH 48931	25 mm	80 mm	2	4	100	832	White
MG-VRT-RH 48131	25 mm	80 mm	2	4	100	832	Black
MG-VRT-RH 48914	25 mm	100 mm	2	4	200	206	White
MG-VRT-RH 48414	25 mm	100 mm	2	4	200	206	Yellow
MG-VRT-RH 48114	25 mm	100 mm	2	4	200	206	Black
MG-VRT-RH 48930	35 mm	50 mm	2	6	150	833	White
MG-VRT-RH 48130	35 mm	50 mm	2	6	150	833	Black
MG-VRT-RH 48937	35 mm	80 mm	2	3	78	827	White
MG-VRT-RH 48437	35 mm	80 mm	2	3	78	827	Yellow
MG-VRT-RH 48237	35 mm	80 mm	2	3	78	827	Red
MG-VRT-RH 48637	35 mm	80 mm	2	3	78	827	Blue
MG-VRT-RH 48909	35 mm	100 mm	2	3	75	818	White
MG-VRT-RH 48409	35 mm	100 mm	2	3	75	818	Yellow
MG-VRT-RH 48923	35 mm	142 mm	2	3	150	835	White
MG-VRT-RH 48911	50 mm	100 mm	4	2	50	811	White
MG-VRT-RH 48411	50 mm	100 mm	4	2	50	811	Yellow
MG-VRT-RH 48811GY	50 mm	100 mm	4	2	50	811	Grey

MG-VRT-RH 48915	75 mm	120 mm	4	1	50	816	White
MG-VRT-RH 48938	15 mm	80 mm	2	7	175	828	White
MG-VRT-RH 48415	75 mm	120 mm	4	1	50	816	Yellow
MG-VRT-RH 48215	75 mm	120 mm	4	1	50	816	Red
MG-VRT-RH 48115	75 mm	120 mm	4	1	50	816	Black
MG-VRT-RH 48412	105 mm	110 mm	4	1	25	859	Yellow
MG-VRT-RH 48932	29 mm	140 mm	2	3	75	834	White
MG-VRT-RH 48912	105 mm	110 mm	4	1	25	859	White
MG-VRT-RH 48712GY	105 mm	110 mm	4	1	25	859	Grey