

CABLE TAGS TPM-ROLL

Precut 4mm push in markers, on a reel

TPM-ROLL tags are used for marking cables, conduit, tubes, conductors and components. Presented in stem format, tags are simply snapped off their stems and inserted into the appropriate holders.



CERTIFICATES 

 2011/65/EU

LABORATORY TEST 

CEI EN 60950-1

INDELIBILITY

Information technology equipment - Safety

Part 1: General requirements

§ 1.7.11 Durability

Compliance is checked by inspection and by rubbing the marking by hand for 15 s with a piece of cloth soaked with water and again for 15 s with a piece of cloth soaked with hexane.

After this test, the marking shall be legible; it shall not be possible to remove marking plates easily and they shall show no curling.

CEI EN 61010-1

INDELIBILITY

Ed.2 equivalent to VDE 0411-1

Safety indications for electric devices for measurement, control and laboratory use

Part 1: General indications

This regulation requires that both material and the print shall withstand, cleaning with chemical agents commonly used in industry.

By rubbing manually by hand, without excessive pressure, for 30 seconds with a cloth soaked in the specific detergent or, if not specified, Isopropyl Alcohol.

CEMBRE STANDARD

INDELIBILITY


This test was created to simulate cleaning with chemical products commonly used on various surfaces.

By wiping with a cloth soaked in 95% Ethanol 30 times and making a visual inspection after every 10 passes.

CABLE TAGS TPM-ROLL

Technical characteristics

Min operating temperature range	-30 °C
Max operating temperature range	80 °C
UL94 class	V0
Material	Rigid PVC
Precut	yes

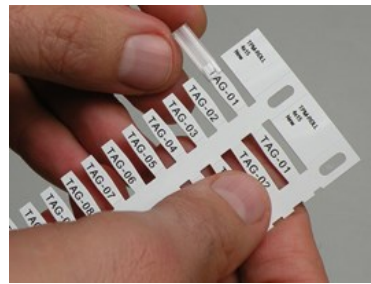

CABLE TAGS TPM-ROLL

List of products

TPM-ROLL						
Type	Height	Length	Pack qty	SWcode	Colour	Geometric shape
TPM-ROLL 44090B	4 mm	10 mm	16,356	4020	White	rectangular easy entry
TPM-ROLL 44091B	4 mm	12 mm	12,552	4022	White	rectangular easy entry
TPM-ROLL 44092B	4 mm	15 mm	12,552	4023	White	rectangular easy entry
TPM-ROLL 44093B	4 mm	20 mm	10,200	4005	White	rectangular with square corners
TPM-ROLL 44096	4 mm	30 mm	6,270	4006	White	rectangular with square corners
TPM-ROLL 44097B	4 mm	40 mm	5,005	4007	White	rectangular with square corners
TPM-ROLL 44040B	4 mm	10 mm	16,356	4020	Yellow	rectangular easy entry
TPM-ROLL 44041B	4 mm	12 mm	12,552	4022	Yellow	rectangular easy entry
TPM-ROLL 44042B	4 mm	15 mm	12,552	4023	Yellow	rectangular easy entry
TPM-ROLL 44043B	4 mm	20 mm	10,200	4005	Yellow	rectangular with square corners
TPM-ROLL 44046	4 mm	30 mm	6,270	4006	Yellow	rectangular with square corners
TPM-ROLL 44047B	4 mm	40 mm	5,005	4007	Yellow	rectangular with square corners

Products used together

Printers

Thermal transfer printer for roll media ROLLY3000 - Thermal transfer printer for roll media ROLLY3000

Thermal transfert printer on roll ROLLY2000 990910 - ROLLY2000