

# MODULAR COMPONENT LEGEND STRIPS STRIP-ROLL-R

*on a reel*

Continuous STRIP-ROLL can be used for the identification of modular components. GENIUSPRO software allows max label length 1.000 mm, with the ability to customise the pitch.



LABORATORY TEST 

## **CEI EN 60950-1**

### **INDELIBILITY**

#### **Information technology equipment - Safety**

*Part 1: General requirements*

*§ 1.7.11 Durability*

Compliance is checked by inspection and by rubbing the marking by hand for 15 s with a piece of cloth soaked with water and again for 15 s with a piece of cloth soaked with hexane.

After this test, the marking shall be legible; it shall not be possible to remove marking plates easily and they shall show no curling.

## **CEI EN 61010-1**

### **INDELIBILITY**

**Ed.2 equivalent to VDE 0411-1**

#### **Safety indications for electric devices for measurement, control and laboratory use**

*Part 1: General indications*

This regulation requires that both material and the print shall withstand, cleaning with chemical agents commonly used in industry.

By rubbing manually by hand, without excessive pressure, for 30 seconds with a cloth soaked in the specific detergent or, if not specified, Isopropyl Alcohol.

## **CEMBRE STANDARD**

**INDELIBILITY**

This test was created to simulate cleaning with chemical products commonly used on various surfaces.


By wiping with a cloth soaked in 95% Ethanol 30 times and making a visual inspection after every 10 passes.

---

# MODULAR COMPONENT LEGEND STRIPS **STRIP-ROLL-R**

## *Technical characteristics*

|                                 |                                 |
|---------------------------------|---------------------------------|
| Min operating temperature range | -30 °C                          |
| Max operating temperature range | 80 °C                           |
| UL94 class                      | V0                              |
| Material                        | Rigid PVC                       |
| Geometric shape                 | rectangular with square corners |

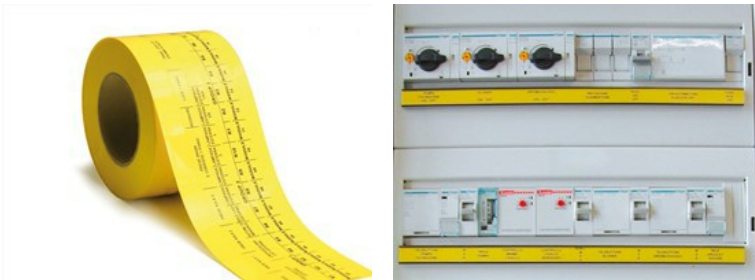

# MODULAR COMPONENT LEGEND STRIPS STRIP-ROLL-R

## List of products

| <b>STRIP-ROLL-R</b> |        |        |                    |          |        |        |
|---------------------|--------|--------|--------------------|----------|--------|--------|
| Type                | Height | Length | Quantity per sheet | Pack qty | SWcode | Colour |
| STRIP-ROLL-R 13160  | 15 mm  | 25 m   | 4                  | 1        |        | White  |
| STRIP-ROLL-R 13164  | 15 mm  | 25 m   | 4                  | 1        |        | Yellow |
| STRIP-ROLL-R 13161  | 21 mm  | 25 m   | 3                  | 1        |        | White  |
| STRIP-ROLL-R 13171  | 21 mm  | 25 m   | 3                  | 1        |        | Yellow |
| STRIP-ROLL-R 13162  | 36 mm  | 25 m   | 2                  | 1        |        | White  |
| STRIP-ROLL-R 13172  | 36 mm  | 25 m   | 2                  | 1        |        | Yellow |
| STRIP-ROLL-R 13179  | 40 mm  | 25 m   | 2                  | 1        | 4294   | White  |
| STRIP-ROLL-R 13174  | 40 mm  | 25 m   | 2                  | 1        | 4294   | Yellow |
| STRIP-ROLL-R 13290  | 80 mm  | 25 m   | 1                  | 1        | 4282   | White  |
| STRIP-ROLL-R 13240  | 80 mm  | 25 m   | 1                  | 1        | 4282   | Yellow |

## Products used together

### Printers

**Thermal transfer printer for roll media ROLLY3000 - Thermal transfer printer for roll media ROLLY3000**

**Thermal transfert printer on roll ROLLY2000 990910 - ROLLY2000 990910**