



MODULAR COMPONENT LEGEND STRIPS STRIP-ROLL-PY

on a reel

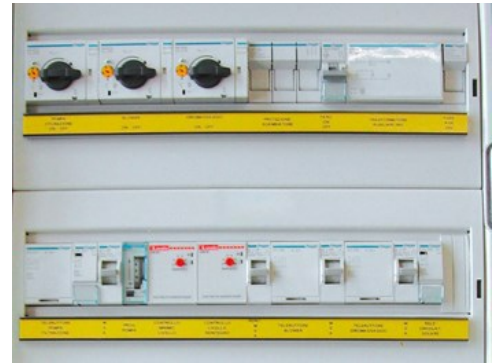

CERTIFICATES 

 2011/65/EU

LABORATORY TEST 

CEI EN 60950-1

INDELIBILITY

Information technology equipment - Safety

Part 1: General requirements

§ 1.7.11 Durability

Compliance is checked by inspection and by rubbing the marking by hand for 15 s with a piece of cloth soaked with water and again for 15 s with a piece of cloth soaked with hexane.

After this test, the marking shall be legible; it shall not be possible to remove marking plates easily and they shall show no curling.

CEI EN 61010-1

INDELIBILITY

Ed.2 equivalent to VDE 0411-1

Safety indications for electric devices for measurement, control and laboratory use

Part 1: General indications

This regulation requires that both material and the print shall withstand, cleaning with chemical agents commonly used in industry.

By rubbing manually by hand, without excessive pressure, for 30 seconds with a cloth soaked in the specific detergent or, if not specified, Isopropyl Alcohol.

CEMBRE STANDARD

INDELIBILITY

This test was created to simulate cleaning with chemical products commonly used on various surfaces.

By wiping with a cloth soaked in 95% Ethanol 30 times and making a visual inspection after every 10 passes.

CEI EN 60464-2

RESISTANCE TO SOLVENT VAPOUR

Resistance to solvent vapour is verified by the condition of the test sample following exposure

The standard requires the sample to be placed in a container of the specified solvent.

The test samples must be suspended vertically with the lower edge around 150 mm above the surface of the test solvent. During the exposure, the liquid must not evaporate completely and, if necessary, must be topped up.

The temperature of the test solvent must be 23 ± 2 °C and the duration of exposure must be $168\text{h} \pm 1$ (seven days).

After removal from the container, each test sample must be examined to determine whether there has been any change in appearance, loss of adherence of the sub layer, exfoliation, detachment, bulging or other signs of deterioration.

The solvents used by Cembre for this test are: Acetone, Ethanol, Hexane

MODULAR COMPONENT LEGEND STRIPS **STRIP-ROLL-PY**

Technical characteristics

Min operating temperature range	-40 °C
Max operating temperature range	140 °C
Min application temperature	10 °C
Max application temperature	40 °C
Material	Polyester film
Geometric shape	rectangular with square corners



MODULAR COMPONENT LEGEND STRIPS **STRIP-ROLL-PY**

List of products

STRIP-ROLL-PY

Type	Height	Length	Quantity per sheet	Pack qty	Colour
STRIP-ROLL-PY 13189	15 mm	25 mm	4	1	White

Products used together

Printers

Thermal transfer printer for roll media ROLLY3000 - Thermal transfer printer for roll media ROLLY3000

Thermal transfert printer on roll ROLLY2000 990910 - ROLLY2000 990910