

HALOGEN FREE INSULATED TERMINALS P-PPL

hooked blade terminals


The “P” range of terminals has been designed, to meet the increasing demands for improved safety and reliability of electrical connectors. The Polycarbonate insulation, is a halogen free, self extinguishing thermoplastic material class V0 (UL 94). The unique funnel shaped entry of the insulation sleeve, guarantees total insertion of the conductor strands into the terminal barrel, creating a secure and reliable, electrical and mechanical connection.



HALOGEN FREE INSULATED TERMINALS P-PPL

Technical characteristics


Min operating temperature range	-20 °C
Max operating temperature range	115 °C
Max operating temperature range (surge)	130 °C
UL94 class	V0
Halogen Free	yes
Easy entry	yes
Dimensional form	Hooked blade terminal
Material (Body)	Electrolytic copper
Material (Partially reinforced)	Polycarbonate

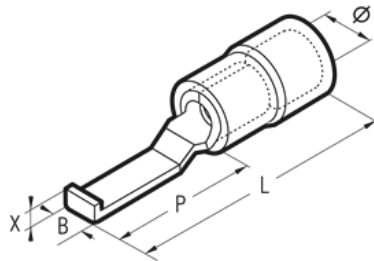

HALOGEN FREE INSULATED TERMINALS P-PPL

List of products

RP-PPL Cable type: flexible copper, Minimum section: 0.25 mm², Maximum section: 1.5 mm²




	Type	Colour	Ø	B	P	L	X	Pack qty	Min. pack qty	
	RP-PPL30	Red	4 mm	3 mm	17.5 mm	28.3 mm	1.7 mm	3,000	100	
	RP-PPL46	Red	4 mm	4.6 mm	17.5 mm	28.3 mm	1.7 mm	3,000	100	

Products used together

Nest

Interchangeable dies P-1 - PR-1

RP-PPL Cable type: copper, Minimum section: 0.25 mm², Maximum section: 1.5 mm²




	Type	Colour	Ø	B	P	L	X	Pack qty	Min. pack qty	
	RP-PPL30	Red	4 mm	3 mm	17.5 mm	28.3 mm	1.7 mm	3,000	100	
	RP-PPL46	Red	4 mm	4.6 mm	17.5 mm	28.3 mm	1.7 mm	3,000	100	


Products used together

Nest

Interchangeable dies P-1 - PR-1

BP-PPL Cable type: copper, Minimum section: 1.5 mm², Maximum section: 2.5 mm²




	Type	Colour	Ø	B	P	L	X	Pack qty	Min. pack qty	
	BP-PPL30	Blue	4.9 mm	3 mm	17.5 mm	28.3 mm	1.7 mm	2,500	100	
	BP-PPL46	Blue	4.9 mm	4.6 mm	17.5 mm	28.8 mm	1.7 mm	2,500	100	

Products used together

Nest

Interchangeable dies P-1 - PB-1

BP-PPL Cable type: flexible copper, Minimum section: 1.5 mm², Maximum section: 2.5 mm²



	Type	Colour	Ø	B	P	L	X	Pack qty	Min. pack qty	
	BP-PPL30	Blue	4.9 mm	3 mm	17.5 mm	28.3 mm	1.7 mm	2,500	100	
	BP-PPL46	Blue	4.9 mm	4.6 mm	17.5 mm	28.8 mm	1.7 mm	2,500	100	

Products used together

Nest

Interchangeable dies P-1 - PB-1

GP-PPL Cable type: flexible copper, Minimum section: 4 mm², Maximum section: 6 mm²



	Type	Colour	Ø	B	P	L	X	Pack qty	Min. pack qty	
	GP-PPL46	Yellow	6.6 mm	4.6 mm	17.5 mm	32.6 mm	1.9 mm	1,000	100	



Products used together

Nest

Interchangeable dies P-1 - PG-1

GP-PPL Cable type: copper, Minimum section: 4 mm², Maximum section: 6 mm²



	Type	Colour	Ø	B	P	L	X	Pack qty	Min. pack qty	
	GP-PPL46	Yellow	6.6 mm	4.6 mm	17.5 mm	32.6 mm	1.9 mm	1,000	100	

Products used together

Nest

Interchangeable dies P-1 - PG-1