

# BUTT CONNECTORS PL-M

*PVC insulated*

Manufactured from copper tube  
Electrolytically tin plated  
The connectors are manufactured from electrolytic Copper Cu-ETP CWO04A according to UNI EN 13600 and are tin plated with a minimum thickness of 3µm.



CERTIFICATES 



USL-CNL E125401 Canada & United States  
File no. E125401




2011/65/EU

## BUTT CONNECTORS PL-M

### *Technical characteristics*


Dimensional form	Butt
Min operating temperature range	-20 °C
Max operating temperature range	80 °C
Max operating temperature range (surge)	90 °C

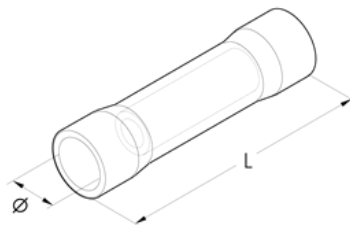


## BUTT CONNECTORS PL-M

### List of products


#### PL-M Cable type: flexible copper, Minimum section: 0.2 mm<sup>2</sup>, Maximum section: 0.5 mm<sup>2</sup>



Type	Colour	Ø	L	Pack qty	Min. pack qty	
PL01-M	Green	3 mm	25 mm	3,000	100	


#### PL-M Cable type: copper, Minimum section: 0.2 mm<sup>2</sup>, Maximum section: 0.5 mm<sup>2</sup>



Type	Colour	Ø	L	Pack qty	Min. pack qty	
PL01-M	Green	3 mm	25 mm	3,000	100	


#### PL-M Cable type: flexible copper, Minimum section: 0.25 mm<sup>2</sup>, Maximum section: 1.5 mm<sup>2</sup>




Type	Colour	Ø	L	Pack qty	Min. pack qty	
PL03-M	Red	4 mm	25 mm	1,000	100	

#### PL-M Cable type: copper, Minimum section: 0.25 mm<sup>2</sup>, Maximum section: 1.5 mm<sup>2</sup>




Type	Colour	Ø	L	Pack qty	Min. pack qty	
PL03-M	Red	4 mm	25 mm	1,000	100	

**PL-M** Cable type: copper, Minimum section: 1.5 mm<sup>2</sup>, Maximum section: 2.5 mm<sup>2</sup>




Type	Colour	Ø	L	Pack qty	Min. pack qty	
PL06-M	Blue	5 mm	25 mm	1,500	100	

**PL-M** Cable type: flexible copper, Minimum section: 1.5 mm<sup>2</sup>, Maximum section: 2.5 mm<sup>2</sup>




Type	Colour	Ø	L	Pack qty	Min. pack qty	
PL06-M	Blue	5 mm	25 mm	1,500	100	

**PL-M** Cable type: flexible copper, Minimum section: 4 mm<sup>2</sup>, Maximum section: 6 mm<sup>2</sup>



Type	Colour	Ø	L	Pack qty	Min. pack qty	
PL1-M	Yellow	6.5 mm	32 mm	500	100	

**PL-M** Cable type: copper, Minimum section: 4 mm<sup>2</sup>, Maximum section: 6 mm<sup>2</sup>



Type	Colour	Ø	L	Pack qty	Min. pack qty	
PL1-M	Yellow	6.5 mm	32 mm	500	100	