



BUTT CONNECTORS PL-M

PVC insulated

Manufactured from copper tube
Electrolytically tin plated




CERTIFICATES 

 According to UL 486A standard (file E125401)  2011/65/EU

BUTT CONNECTORS PL-M

Technical characteristics


Dimensional form	Butt
Min operating temperature range	-20 °C
Max operating temperature range	80 °C
Max operating temperature range (surge)	90 °C

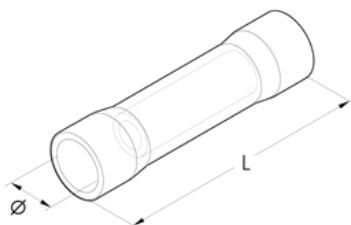


BUTT CONNECTORS PL-M

List of products


PL-M Cable type: flexible copper, Minimum section: 0.2 mm², Maximum section: 0.5 mm²



Type	Colour	Ø	L	Pack qty	Min. pack qty	
PL01-M	Green	3 mm	25 mm	3,000	100	

PL-M Cable type: copper, Minimum section: 0.2 mm², Maximum section: 0.5 mm²




Type	Colour	Ø	L	Pack qty	Min. pack qty	
PL01-M	Green	3 mm	25 mm	3,000	100	

PL-M Cable type: flexible copper, Minimum section: 0.25 mm², Maximum section: 1.5 mm²




Type	Colour	Ø	L	Pack qty	Min. pack qty	
PL03-M	Red	4 mm	25 mm	1,000	100	
PL03-P	Red	4 mm	20 mm	3,000	100	

PL-M Cable type: copper, Minimum section: 0.25 mm², Maximum section: 1.5 mm²



Type	Colour	Ø	L	Pack qty	Min. pack qty	
PL03-M	Red	4 mm	25 mm	1,000	100	
PL03-P	Red	4 mm	20 mm	3,000	100	

PL-M Cable type: copper, Minimum section: 1.5 mm², Maximum section: 2.5 mm²




Type	Colour	Ø	L	Pack qty	Min. pack qty	
PL06-M	Blue	5 mm	25 mm	1,500	100	
PL06-P	Blue	5 mm	16 mm	2,000	100	

PL-M Cable type: flexible copper, Minimum section: 1.5 mm², Maximum section: 2.5 mm²




Type	Colour	Ø	L	Pack qty	Min. pack qty	
PL06-M	Blue	5 mm	25 mm	1,500	100	
PL06-P	Blue	5 mm	16 mm	2,000	100	

PL-M Cable type: flexible copper, Minimum section: 4 mm², Maximum section: 6 mm²



Type	Colour	Ø	L	Pack qty	Min. pack qty	
PL1-M	Yellow	6.5 mm	32 mm	500	100	

PL-M Cable type: copper, Minimum section: 4 mm², Maximum section: 6 mm²



Type	Colour	Ø	L	Pack qty	Min. pack qty	
PL1-M	Yellow	6.5 mm	32 mm	500	100	