




BUTT PARALLEL PL-P

PVC insulated

Manufactured from copper tube
Electrolytically tin plated




CERTIFICATES 

 BT 2006/95/CE  According to UL 486A standard (file E125401)  2011/65/EU

BUTT PARALLEL PL-P

Technical characteristics


Dimensional form	Parallel
Min operating temperature range	-20 °C
Max operating temperature range	80 °C
Max operating temperature range (surge)	90 °C

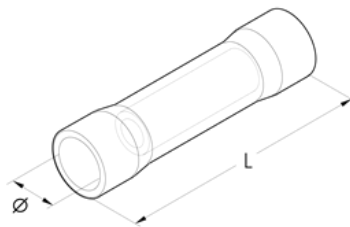


BUTT PARALLEL PL-P


List of products


PL-P Cable type: flexible copper, Minimum section: 0.25 mm², Maximum section: 1.5 mm²




Type	Length	Diameter	Pack qty	Min. pack qty	Colour	
PL03-P	20 mm	4 mm	3,000	100	Red	


PL-P Cable type: copper, Minimum section: 0.25 mm², Maximum section: 1.5 mm²



Type	Length	Diameter	Pack qty	Min. pack qty	Colour	
PL03-P	20 mm	4 mm	3,000	100	Red	

PL-P Cable type: copper, Minimum section: 1.5 mm², Maximum section: 2.5 mm²



Type	Length	Diameter	Pack qty	Min. pack qty	Colour	
PL06-P	16 mm	5 mm	2,000	100	Blue	

PL-P Cable type: flexible copper, Minimum section: 1.5 mm², Maximum section: 2.5 mm²



Type	Length	Diameter	Pack qty	Min. pack qty	Colour	
PL06-P	16 mm	5 mm	2,000	100	Blue	