

# BUTT PARALLEL PL-P

*PVC insulated*

Manufactured from copper tube  
Electrolytically tin plated  
The connectors are manufactured from electrolytic Copper Cu-ETP CWO04A according to UNI EN 13600 and are tin plated with a minimum thickness of 3µm.



CERTIFICATES 




2011/65/EU

## BUTT PARALLEL PL-P

### *Technical characteristics*


Dimensional form	Parallel
Min operating temperature range	-20 °C
Max operating temperature range	80 °C
Max operating temperature range (surge)	90 °C

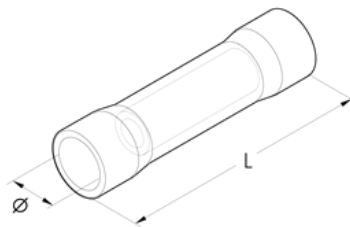


# BUTT PARALLEL PL-P


## List of products


**PL-P** Cable type: flexible copper, Minimum section: 0.25 mm<sup>2</sup>, Maximum section: 1.5 mm<sup>2</sup>



Type	Length	Diameter	Pack qty	Min. pack qty	Colour	
PL03-P	20 mm	4 mm	3,000	100	Red	


**PL-P** Cable type: copper, Minimum section: 0.25 mm<sup>2</sup>, Maximum section: 1.5 mm<sup>2</sup>



Type	Length	Diameter	Pack qty	Min. pack qty	Colour	
PL03-P	20 mm	4 mm	3,000	100	Red	

**PL-P** Cable type: copper, Minimum section: 1.5 mm<sup>2</sup>, Maximum section: 2.5 mm<sup>2</sup>



Type	Length	Diameter	Pack qty	Min. pack qty	Colour	
PL06-P	16 mm	5 mm	2,000	100	Blue	

**PL-P** Cable type: flexible copper, Minimum section: 1.5 mm<sup>2</sup>, Maximum section: 2.5 mm<sup>2</sup>



Type	Length	Diameter	Pack qty	Min. pack qty	Colour	
PL06-P	16 mm	5 mm	2,000	100	Blue	