

# FEMALE CONNECTORS BN-FA

*Open barrel*

Manufactured from brass strip




CERTIFICATES 

 BT 2006/95 CE

# FEMALE CONNECTORS BN-FA

## *Technical characteristics*


Material (Body)	Brass
Dimensional form	Female terminal
Min operating temperature range	-40 °C
Max operating temperature range	125 °C

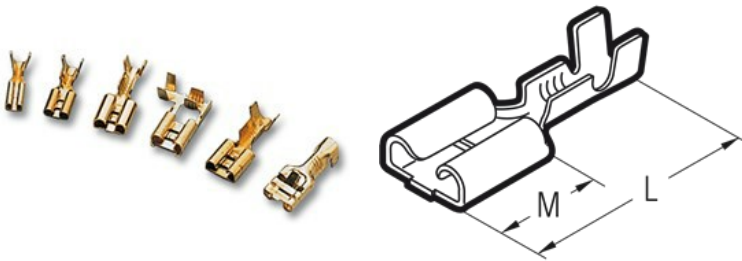

## FEMALE CONNECTORS BN-FA


### List of products

#### **BN-FA** Cable type: flexible copper, Minimum section: 1 mm<sup>2</sup>, Maximum section: 2.5 mm<sup>2</sup>



Type	L	M	Width	Height of the hooked	Pack qty	Min. pack qty
BN-FA608	19 mm	7.7 mm	6.3 mm	0.8 mm	2,000	100
BN-FAB608	15.5 mm	7.7 mm	6.3 mm	0.8 mm	1,000	100
BN-FAR608	19 mm	7.7 mm	6.3 mm	0.8 mm	3,000	100

#### **BN-FA** Cable type: copper, Minimum section: 1 mm<sup>2</sup>, Maximum section: 2.5 mm<sup>2</sup>



Type	L	M	Width	Height of the hooked	Pack qty	Min. pack qty
BN-FA608	19 mm	7.7 mm	6.3 mm	0.8 mm	2,000	100
BN-FAB608	15.5 mm	7.7 mm	6.3 mm	0.8 mm	1,000	100
BN-FAR608	19 mm	7.7 mm	6.3 mm	0.8 mm	3,000	100