

MALE TABS MP608


for board mounting

Male tabs have been designed to meet the increasingly stringent requirements of the market with respect to the reliability and safety of electrical connection components.

Manufactured from Brass strip P-Cu Zn 30 UNI 4895/1962 (Cu Zn 30 DIN 17660/1974 ; Cu Zn 30 NF A51-101/1977)
Type MP608D with double tab.




CERTIFICATES 

 BT 2006/95 CE

MALE TABS MP608

Technical characteristics

Dimensional form	Male terminal
Min operating temperature range	-40 °C
Max operating temperature range	125 °C
Material (Body)	Brass

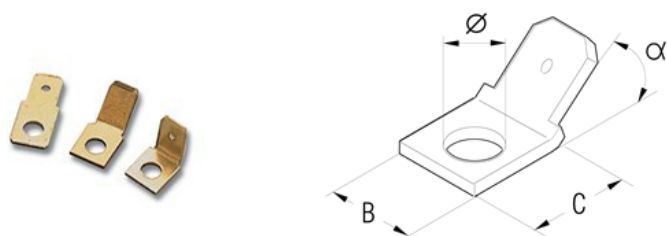

MALE TABS MP608

List of products

MP608



Type	Ø	B	C	α	Pack qty	Min. pack qty
MP608	4 mm	8 mm	8.5 mm	0°	5,000	100
MP608/45	4 mm	8 mm	8.5 mm	45°	6,000	100
MP608/90	4 mm	8 mm	8.5 mm	90°	5,000	100
MP608D	5 mm	8 mm	14 mm	0°	5,000	100