

# UNINSULATED END SLEEVES PKE

*for flexible copper cables*

The PKE ranges of end sleeves are manufactured from tin plated electrolytic copper.  
Designed and developed to reinforce the fine wire strands, when terminating a cable into a connector block.



## Technical details

The connectors are manufactured from Copper Cu DHP UNI 5649/1988  
(corresponding to: SF-Cu DIN 1787/1973 Cu/b1 NF A 51-050)

Tin plated with a minimum thickness of 3µm.

Main characteristics of the PA6 sleeves:


- >DIELECTRIC STRENGTH (KV/mm) : >16,5
- >VOLUME RESISTIVITY ( $\Omega \cdot \text{cm}$ ) :  $>10^{13}$
- >MAX OPERATING TEMPERATURE ( $^{\circ}\text{C}$ ) : 115-130
- >FLAMMABILITY (UL94) : V2
- >DENSITY ( $\text{g}/\text{cm}^3$ ) : 1,14
- >WATER ABSORPTION (%) : 1,5
- >BREAKING LOAD ( $\text{N}/\text{mm}^2$ ) : 77

The connectors can be stored at a minimum temperature not below - 40°C.

# UNINSULATED END SLEEVES PKE

## *Technical characteristics*


Halogen Free	yes
Min operating temperature range	-20 °C
Max operating temperature range	115 °C
Max operating temperature range (surge)	130 °C
Material (Body)	ETP Copper electrolytically tinned
Material (Partially reinforced)	Polyamide PA6

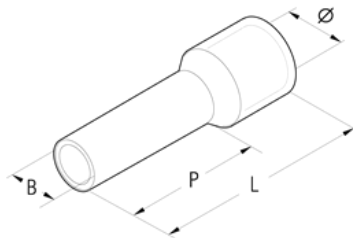

# UNINSULATED END SLEEVES PKE


## List of products

### **PKE** Cable type: flexible copper, Maximum section: 0.75 mm<sup>2</sup>




Type	Colour	Ø	B	P	L	Pack qty	Min. pack qty
PKE7508	Blue	2.8 mm	1.6 mm	8 mm	14 mm	5,000	500

### **PKE** Cable type: flexible copper, Maximum section: 1 mm<sup>2</sup>




Type	Colour	Ø	B	P	L	Pack qty	Min. pack qty
PKE108	Red	3 mm	1.8 mm	8 mm	14 mm	6,000	500

### **PKE** Cable type: flexible copper, Maximum section: 1.5 mm<sup>2</sup>




Type	Colour	Ø	B	P	L	Pack qty	Min. pack qty
PKE1508	Black	3.5 mm	2.1 mm	8 mm	14 mm	5,000	500
PKE1510	Black	3.5 mm	2.1 mm	10 mm	16 mm	5,000	500
PKE1518	Black	3.5 mm	2.1 mm	18 mm	24 mm	5,000	500


### **PKE** Cable type: flexible copper, Maximum section: 1.5 mm<sup>2</sup>




Type	Colour	Ø	B	P	L	Pack qty	Min. pack qty
PKE1508	Black	3.5 mm	2.1 mm	8 mm	14 mm	5,000	500
PKE1510	Black	3.5 mm	2.1 mm	10 mm	16 mm	5,000	500

**PKE** Cable type: flexible copper, Maximum section: 2.5 mm<sup>2</sup>



Type	Colour	Ø	B	P	L	Pack qty	Min. pack qty
PKE2508	Grey	4.2 mm	2.6 mm	8 mm	14 mm	5,000	500
PKE2512	Grey	4.2 mm	2.6 mm	12 mm	18 mm	5,000	500
PKE2518	Grey	4.2 mm	2.6 mm	18 mm	24 mm	5,000	500

**PKE** Cable type: flexible copper, Maximum section: 4 mm<sup>2</sup>



Type	Colour	Ø	B	P	L	Pack qty	Min. pack qty
PKE410	Orange	4.8 mm	3.3 mm	10 mm	18 mm	3,000	200
PKE412	Orange	4.8 mm	3.3 mm	12 mm	20 mm	3,000	200
PKE418	Orange	4.8 mm	3.3 mm	18 mm	26 mm	3,000	200

**PKE** Cable type: flexible copper, Maximum section: 6 mm<sup>2</sup>



Type	Colour	Ø	B	P	L	Pack qty	Min. pack qty
PKE612	Green	5.8 mm	5.8 mm	12 mm	20 mm	1,500	100
PKE618	Green	5.8 mm	5.8 mm	18 mm	26 mm	2,000	100

**PKE** Cable type: flexible copper, Maximum section: 10 mm<sup>2</sup>



Type	Colour	Ø	B	P	L	Pack qty	Min. pack qty
PKE1012	Brown	7.4 mm	7.4 mm	12 mm	22 mm	1,000	100
PKE1018	Brown	7.4 mm	7.4 mm	18 mm	28 mm	1,000	100

**PKE** Cable type: flexible copper, Maximum section: 16 mm<sup>2</sup>



Type	Colour	Ø	B	P	L	Pack qty	Min. pack qty
PKE1612	White	8.8 mm	6.2 mm	12 mm	23 mm	800	100
PKE1618	White	8.8 mm	6.2 mm	18 mm	29 mm	1,000	100

**PKE** Cable type: flexible copper, Maximum section: 25 mm<sup>2</sup>


Type	Colour	Ø	B	P	L	Pack qty	Min. pack qty	
PKE25016	Black	10 mm	7.9 mm	16 mm	30 mm	500	50	
PKE25022	Black	10 mm	7.9 mm	22 mm	36 mm	500	50	

**PKE** Cable type: flexible copper, Minimum section: 0.1 mm<sup>2</sup>, Maximum section: 0.3 mm<sup>2</sup>


Type	Colour	Ø	B	P	L	Pack qty	Min. pack qty
PKE308	Yellow	1.9 mm	1.1 mm	8 mm	12.4 mm	20,000	500

**PKE** Cable type: flexible copper, Minimum section: 0.3 mm<sup>2</sup>, Maximum section: 0.5 mm<sup>2</sup>


Type	Colour	Ø	B	P	L	Pack qty	Min. pack qty
PKE508	White	2.6 mm	1.4 mm	8 mm	14 mm	10,000	500