

UNINSULATED END SLEEVES KE

for flexible copper cables

KE series end sleeves are manufactured from tin plated electrolytic copper.
Designed and developed for use with flexible cables.



CERTIFICATES 




2011/65/EU

UNINSULATED END SLEEVES **KE**

Technical characteristics

Material (Body)


ETP Copper electrolytically tinned

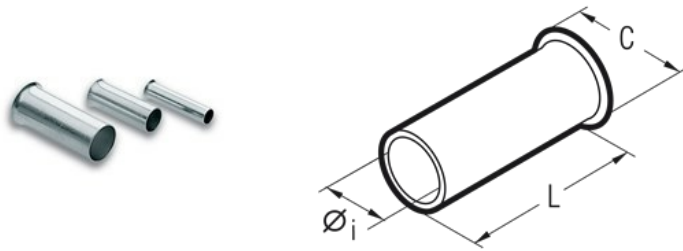

UNINSULATED END SLEEVES KE


List of products

KE Cable type: flexible copper, Maximum section: 0.5 mm²




| Type | Ø | L | Pack qty | Min. pack qty |
|---------|------|------|----------|---------------|
| KE506ST | 1 mm | 6 mm | 50,000 | 500 |
| KE508ST | 1 mm | 8 mm | 50,000 | 500 |

KE Cable type: flexible copper, Maximum section: 0.75 mm²




| Type | Ø | L | Pack qty | Min. pack qty |
|----------|--------|------|----------|---------------|
| KE7506ST | 1.2 mm | 6 mm | 40,000 | 500 |
| KE7508ST | 1.2 mm | 8 mm | 50,000 | 500 |

KE Cable type: flexible copper, Maximum section: 1 mm²




| Type | Ø | L | Pack qty | Min. pack qty |
|---------|--------|-------|----------|---------------|
| KE106ST | 1.4 mm | 6 mm | 25,000 | 500 |
| KE110ST | 1.4 mm | 10 mm | 25,000 | 500 |


KE Cable type: flexible copper, Maximum section: 1.5 mm²




| Type | Ø | L | Pack qty | Min. pack qty |
|----------|--------|-------|----------|---------------|
| KE1510ST | 1.7 mm | 10 mm | 25,000 | 500 |
| KE1508ST | 1.7 mm | 8 mm | 25,000 | 500 |

KE Cable type: flexible copper, Maximum section: 2.5 mm²



| Type | Ø | L | Pack qty | Min. pack qty |
|----------|--------|-------|----------|---------------|
| KE2508ST | 2.2 mm | 8 mm | 20,000 | 500 |
| KE2510ST | 2.2 mm | 10 mm | 15,000 | 500 |

KE Cable type: flexible copper, Maximum section: 4 mm²



| Type | Ø | L | Pack qty | Min. pack qty |
|---------|--------|-------|----------|---------------|
| KE410ST | 2.8 mm | 10 mm | 12,500 | 500 |
| KE412ST | 2.8 mm | 12 mm | 10,000 | 500 |

KE Cable type: flexible copper, Maximum section: 6 mm²


| Type | Ø | L | Pack qty | Min. pack qty |
|---------|--------|-------|----------|---------------|
| KE610ST | 3.5 mm | 10 mm | 10,000 | 500 |
| KE612ST | 3.5 mm | 12 mm | 7,500 | 500 |
| KE616ST | 3.5 mm | 15 mm | 5,000 | 500 |


KE Cable type: flexible copper, Maximum section: 10 mm²


| Type | Ø | L | Pack qty | Min. pack qty |
|----------|--------|-------|----------|---------------|
| KE1016ST | 4.5 mm | 15 mm | 4,000 | 250 |

KE Cable type: flexible copper, Maximum section: 16 mm²



| Type | Ø | L | Pack qty | Min. pack qty |
|----------|--------|-------|----------|---------------|
| KE1616ST | 5.8 mm | 15 mm | 3,000 | 250 |

KE Cable type: flexible copper, Maximum section: 25 mm²



| Type | Ø | L | Pack qty | Min. pack qty |
|-----------|--------|-------|----------|---------------|
| KE25015ST | 7.3 mm | 15 mm | 1,500 | 100 |
| KE25018ST | 7.3 mm | 18 mm | 1,500 | 100 |

KE Cable type: flexible copper, Maximum section: 35 mm²



| Type | Ø | L | Pack qty | Min. pack qty |
|-----------|--------|-------|----------|---------------|
| KE35012ST | 8.3 mm | 12 mm | 1,500 | 100 |
| KE35018ST | 8.3 mm | 18 mm | 1,000 | 100 |
| KE35015ST | 8.3 mm | 16 mm | 1,500 | 100 |