

# POLYAMIDE PA6.6 INSULATED PIN TERMINALS

## ANE-P

ANE-P series terminals are made from electrolytic copper, rolled, tin plated and brazed. The interior of the PA6.6 insulated sleeve is funnel shaped so as to ensure complete and easy introduction of the conductor strands. In order to achieve the best electrical and mechanical performance it is suggested that they are crimped using dies and tools specifically developed for this purpose by Cembre.

“ANE-P” type terminals are manufactured from electrolytic Copper Cu-ETP CWO04A according to UNI EN 13599 and are tin plated to a minimum thickness of 3m.



---

CERTIFICATES 




2011/65/EU

# POLYAMIDE PA6.6 INSULATED PIN TERMINALS ANE-P

## *Technical characteristics*


Min operating temperature range	-20 °C
Max operating temperature range	115 °C
Max operating temperature range (surge)	130 °C
Material (Body)	ETP Copper electrolytically tinned
Material (Partially reinforced)	Polyamide PA6.6

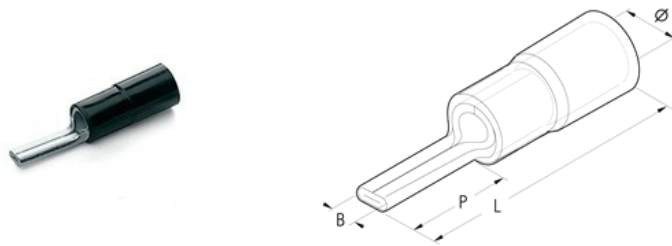

# POLYAMIDE PA6.6 INSULATED PIN TERMINALS ANE-P


## List of products

### ANE-P Cable type: flexible copper, Maximum section: 10 mm<sup>2</sup>




Type	Ø	B	P	L	Pack qty	Min. pack qty
ANE2-P12	8 mm	4.3 mm	14.5 mm	35.1 mm	500	100

### ANE-P Cable type: copper, Maximum section: 10 mm<sup>2</sup>




Type	Ø	B	P	L	Pack qty	Min. pack qty
ANE2-P12	8 mm	4.3 mm	14.5 mm	35.1 mm	500	100

### ANE-P Cable type: flexible copper, Maximum section: 16 mm<sup>2</sup>



Type	Ø	B	P	L	Pack qty	Min. pack qty
ANE3-P14	9.2 mm	5.5 mm	18 mm	41.1 mm	500	100

### ANE-P Cable type: copper, Maximum section: 16 mm<sup>2</sup>



Type	Ø	B	P	L	Pack qty	Min. pack qty
ANE3-P14	9.2 mm	5.5 mm	18 mm	41.1 mm	500	100

**ANE-P** Cable type: flexible copper, Maximum section: 25 mm<sup>2</sup>



Type	Ø	B	P	L	Pack qty	Min. pack qty
ANE5-P16	11.1 mm	7 mm	20.3 mm	45 mm	300	100

**ANE-P** Cable type: copper, Maximum section: 25 mm<sup>2</sup>


Type	Ø	B	P	L	Pack qty	Min. pack qty
ANE5-P16	11.1 mm	7 mm	20.3 mm	45 mm	300	100

**ANE-P** Cable type: flexible copper, Maximum section: 35 mm<sup>2</sup>


Type	Ø	B	P	L	Pack qty	Min. pack qty
ANE7-P20	13.6 mm	8 mm	24.5 mm	55 mm	200	50

**ANE-P** Cable type: copper, Maximum section: 35 mm<sup>2</sup>


Type	Ø	B	P	L	Pack qty	Min. pack qty
ANE7-P20	13.6 mm	8 mm	24.5 mm	55 mm	200	50