


HIGH VOLTAGE COPPER TERMINALS CA-M

Series CA-M terminals are designed for high voltage applications up to 33 kV. They are manufactured from electrolytic copper tube Cu-OF CW008A conform to UNI EN 13600, annealed and tin plated.

The extended barrel enhances both electrical and mechanical performance. The absence of an inspection hole prevents moisture entry into the crimped joint and makes these terminals suitable for outdoor applications.



CERTIFICATES 

 2011/65/EU

HIGH VOLTAGE COPPER TERMINALS **CA-M**


Technical characteristics

Dimensional form

Ring terminal

Material (Body)


ETP Copper electrolytically tinned

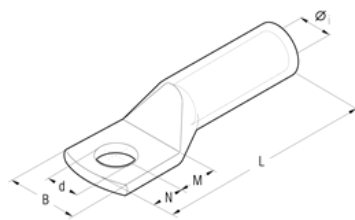

HIGH VOLTAGE COPPER TERMINALS CA-M


List of products

CA25-M *Cable type: copper round, Maximum section: 25 mm²*




Type	Ø Stud mm	Øi	B	M	N	L	d	Pack qty	Min. pack qty
CA25-M8	8 mm	6.8 mm	14 mm	9 mm	8 mm	65 mm	8.4 mm	300	50
CA25-M10	10 mm	6.8 mm	18 mm	13 mm	11 mm	72 mm	10.5 mm	200	50
CA25-M12	12 mm	6.8 mm	21 mm	16 mm	14 mm	78 mm	13.2 mm	200	50

CA40-M *Cable type: copper round compact, Maximum section: 30 mm²*




Type	Ø Stud mm	Øi	B	L	M	N	d	Pack qty	Min. pack qty
CA40S-M12	12 mm	8.2 mm	21 mm	79 mm	16 mm	14 mm	13.2 mm	150	50
CA40S-M16	16 mm	8.2 mm	26 mm	85 mm	19 mm	17 mm	17 mm	100	50

CA40-M *Cable type: copper sector shaped, Minimum section: 30 mm², Maximum section: 40 mm²*




Type	Ø Stud mm	Øi	B	L	M	N	d	Pack qty	Min. pack qty
CA40S-M12	12 mm	8.2 mm	21 mm	79 mm	16 mm	14 mm	13.2 mm	150	50
CA40S-M16	16 mm	8.2 mm	26 mm	85 mm	19 mm	17 mm	17 mm	100	50


CA50-M *Cable type: copper round compact, Maximum section: 50 mm²*




Type	Ø Stud mm	Øi	B	M	N	L	d	Pack qty	Min. pack qty
CA50R-M12	12 mm	8.7 mm	20.5 mm	16 mm	14 mm	79 mm	13.2 mm	150	50

CA50-M Cable type: copper sector shaped, Maximum section: 50 mm²



Type	Ø Stud mm	Øi	B	M	N	L	d	Pack qty	Min. pack qty
CA50S-M12	12 mm	9.5 mm	21 mm	16 mm	14 mm	79 mm	13.2 mm	150	50
CA50S-M16	16 mm	9.5 mm	26 mm	19 mm	17 mm	85 mm	17 mm	100	50

CA95-M Cable type: copper sector shaped, Maximum section: 80 mm²



Type	Ø Stud mm	Øi	B	M	N	L	d	Pack qty	Min. pack qty
CA95R-M12	12 mm	12 mm	28 mm	16 mm	14 mm	91 mm	13.2 mm	50	25
CA95R-M14	14 mm	12 mm	28 mm	18 mm	16 mm	95 mm	15 mm	50	25
CA95S-M12	12 mm	13.5 mm	28 mm	16 mm	14 mm	91 mm	13.2 mm	50	25
CA95S-M14	14 mm	13.5 mm	29 mm	18 mm	16 mm	94.5 mm	15 mm	50	25
CA95S-M16	16 mm	13.5 mm	30 mm	20 mm	17 mm	97 mm	17 mm	30	15

CA95-M Cable type: copper round compact, Maximum section: 95 mm²



Type	Ø Stud mm	Øi	B	M	N	L	d	Pack qty	Min. pack qty
CA95R-M12	12 mm	12 mm	28 mm	16 mm	14 mm	91 mm	13.2 mm	50	25
CA95R-M14	14 mm	12 mm	28 mm	18 mm	16 mm	95 mm	15 mm	50	25

CA150-M Cable type: copper sector shaped, Maximum section: 120 mm²



Type	Ø Stud mm	Øi	B	M	N	L	d	Pack qty	Min. pack qty
CA150R-M12	12 mm	15 mm	31 mm	16 mm	14 mm	97 mm	13.2 mm	30	15
CA150R-M14	14 mm	15 mm	31 mm	18 mm	16 mm	101 mm	15 mm	30	15

CA150-M Cable type: copper sector shaped, Maximum section: 150 mm²



Type	Ø Stud mm	Øi	B	M	N	L	d	Pack qty	Min. pack qty
CA150S-M12	12 mm	16.5 mm	32 mm	16 mm	14 mm	97 mm	13.2 mm	30	15
CA150S-M14	14 mm	16.5 mm	32 mm	18 mm	16 mm	101 mm	15 mm	15	5

CA150-M Cable type: copper round compact, Maximum section: 160 mm²



Type	Ø Stud mm	Øi	B	M	N	L	d	Pack qty	Min. pack qty
CA150S-M12	12 mm	16.5 mm	32 mm	16 mm	14 mm	97 mm	13.2 mm	30	15
CA150S-M14	14 mm	16.5 mm	32 mm	18 mm	16 mm	101 mm	15 mm	15	5

CA150-M Cable type: copper round compact, Minimum section: 120 mm², Maximum section: 150 mm²


Type	Ø Stud mm	Øi	B	M	N	L	d	Pack qty	Min. pack qty
CA150R-M12	12 mm	15 mm	31 mm	16 mm	14 mm	97 mm	13.2 mm	30	15
CA150R-M14	14 mm	15 mm	31 mm	18 mm	16 mm	101 mm	15 mm	30	15


CA200-M Cable type: copper sector shaped, Maximum section: 160 mm²


Type	Ø Stud mm	Øi	B	M	N	L	d	Pack qty	Min. pack qty
CA200R-M14	14 mm	17 mm	32.5 mm	18 mm	16 mm	101 mm	15 mm	15	5

CA200-M Cable type: copper round compact, Maximum section: 200 mm²



Type	Ø Stud mm	Øi	B	M	N	L	d	Pack qty	Min. pack qty
CA200R-M14	14 mm	17 mm	32.5 mm	18 mm	16 mm	101 mm	15 mm	15	5

CA240-M Cable type: copper sector shaped, Maximum section: 200 mm²




Type	Ø Stud mm	Øi	B	M	N	L	d	Pack qty	Min. pack qty
CA240R-M14	14 mm	19.2 mm	43 mm	18 mm	16 mm	107 mm	15 mm	15	5

CA240-M Cable type: copper round compact, Maximum section: 240 mm²




Type	Ø Stud mm	Øi	B	M	N	L	d	Pack qty	Min. pack qty
CA240R-M14	14 mm	19.2 mm	43 mm	18 mm	16 mm	107 mm	15 mm	15	5

CA315-M Cable type: copper sector shaped, Maximum section: 240 mm²




Type	Ø Stud mm	Øi	B	M	N	L	d	Pack qty	Min. pack qty
CA315R-M14	14 mm	21.5 mm	43 mm	18 mm	16 mm	105 mm	15 mm	15	5

CA315-M Cable type: copper round compact, Maximum section: 315 mm²



Type	Ø Stud mm	Øi	B	M	N	L	d	Pack qty	Min. pack qty
CA315R-M14	14 mm	21.5 mm	43 mm	18 mm	16 mm	105 mm	15 mm	15	5

CA315-M Cable type: copper sector shaped, Maximum section: 315 mm²



Type	Ø Stud mm	Øi	B	M	N	L	d	Pack qty	Min. pack qty
CA315S-M14	14 mm	23.7 mm	44 mm	18 mm	16 mm	105 mm	15 mm	15	5