

HYDRAULIC CRIMPING TOOL HT120

Crimping force 120 kN


This lightweight and self contained tool will accept the semi-circular slotted dies, common to most 130 kN tools. It is particularly suitable for installing crimp type electrical connectors for overhead line applications.



MAIN APPLICATIONS - max section mm ²			
L.V. lugs and splices	Insulated Terminals	"C" sleeve connectors	H.V. lugs and splices
400	240	185	400

The tool features a double speed action: a fast advancing speed for rapid approach of the dies to the connector and a slower more powerful speed for crimping. For ease of operation and comfort of the operator the tool head can be fully rotated through 180 degrees. The built-in safety valve will by-pass the oil supply when the maximum pressure is reached, and a pressure release system can easily be operated at any stage of the compression.

	<p><i>HT 120 features a double speed action: a fast advancing speed for rapid approach of the dies to the connector and a slower more powerful speed for crimping.</i></p>
	<p><i>Die release system, protected from accidental operation</i></p>

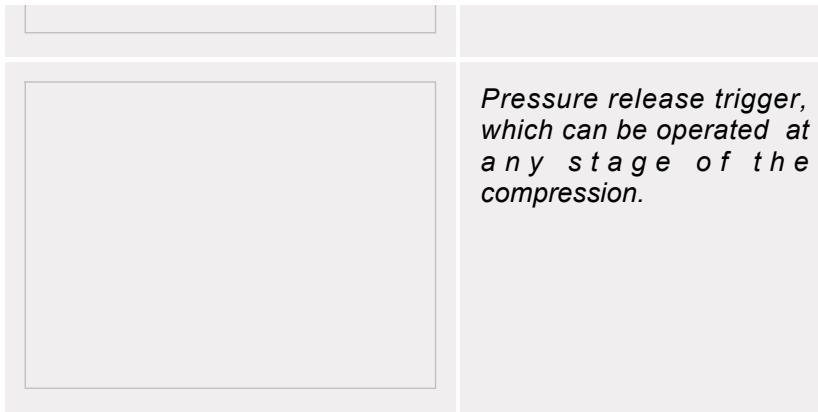

Storage: VAL P3, suitable for storage of the tool and 14 sets of dies.

INSULATED VERSION: Range of applications and accessories for compression are the same of the [uninsulated version](#).

HYDRAULIC CRIMPING TOOL HT120



HYDRAULIC CRIMPING TOOL HT120

List of products

HT120					
Type	Width	Length	Weight	Force developed	Type of action
HT120	138 mm	488 mm	5.7 kg	120 kN	Crimp
HT120-KV	138 mm	492 mm	5.8 kg	120 kN	Crimp