

HIGH VOLTAGE TERMINALS CA-2M

two hole fixing

CA-2M Copper Tube Terminal Lugs are designed for high voltage applications up to 33kV. Manufactured from high purity copper tube, annealed and tin-plated. The extended barrel enhances electrical and mechanical performance. The absence of an inspection hole prevents moisture entry into the crimped joint. Featuring an extended palm with two fixing holes at 44.5mm centres.



CERTIFICATES 




2011/65/EU

HIGH VOLTAGE TERMINALS CA-2M

Technical characteristics


Material (Body)	Tinned electrolytic copper electrolytically
Material (Fixing)	Tinned electrolytic copper electrolytically
No. hole	2
Center distances	44.5 mm

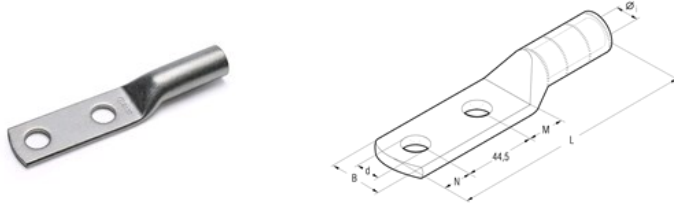

HIGH VOLTAGE TERMINALS CA-2M


List of products

CA40-2M *Cable type: copper round compact, Maximum section: 30 mm²*




Type	Ø Stud mm	Øi mm	B mm	M mm	N mm	L mm	d mm	Pack qty	Min. pack qty	Maximum diameter of the stripped cable	Wheelbase
CA40S-2M12	12 mm	8.2 mm	21.5 mm	16 mm	14 mm	123.5 mm	13.2 mm	100	50	8.2 mm	44.5 mm

CA40-2M *Cable type: copper sector shaped, Minimum section: 30 mm², Maximum section: 40 mm²*




Type	Ø Stud mm	Øi mm	B mm	M mm	N mm	L mm	d mm	Pack qty	Min. pack qty	Maximum diameter of the stripped cable	Wheelbase
CA40S-2M12	12 mm	8.2 mm	21.5 mm	16 mm	14 mm	123.5 mm	13.2 mm	100	50	8.2 mm	44.5 mm

CA50-2M *Cable type: copper round compact, Maximum section: 50 mm²*




Type	Ø Stud mm	Øi mm	B mm	M mm	N mm	L mm	d mm	Pack qty	Min. pack qty	Maximum diameter of the stripped cable	Wheelbase
CA50R-2M12	12 mm	8.7 mm	20.5 mm	16 mm	14 mm	123.5 mm	13.2 mm	100	50	8.7 mm	44.5 mm

CA50-2M *Cable type: copper sector shaped, Maximum section: 50 mm²*




Type	Ø Stud mm	Øi mm	B mm	M mm	N mm	L mm	d mm	Pack qty	Min. pack qty	Maximum diameter of the stripped cable	Wheelbase
CA50S-2M12	12 mm	9.5 mm	21 mm	16 mm	14 mm	123.5 mm	13.2 mm	100	50	9.5 mm	44.5 mm

CA95-2M *Cable type: copper sector shaped, Maximum section: 80 mm²*




Type	Ø Stud mm	Øi	B	M	N	L	d	Pack qty	Min. pack qty	Maximum diameter of the stripped cable	Wheelbase
CA95R-2M14	14 mm	12 mm	28 mm	18 mm	16 mm	139.5 mm	15 mm	30	15	12 mm	44.5 mm
CA95S-2M14	14 mm	13.5 mm	29 mm	18 mm	16 mm	139.5 mm	15 mm	30	15	13.5 mm	44.5 mm

CA95-2M *Cable type: copper round compact, Maximum section: 95 mm²*




Type	Ø Stud mm	Øi	B	M	N	L	d	Pack qty	Min. pack qty	Maximum diameter of the stripped cable	Wheelbase
CA95R-2M14	14 mm	12 mm	28 mm	18 mm	16 mm	139.5 mm	15 mm	30	15	12 mm	44.5 mm

CA150-2M *Cable type: copper sector shaped, Maximum section: 120 mm²*




Type	Ø Stud mm	Øi	B	M	N	L	d	Pack qty	Min. pack qty	Maximum diameter of the stripped cable	Wheelbase
CA150R-2M14	14 mm	15 mm	31 mm	18 mm	16 mm	145.5 mm	15 mm	30	15	15 mm	44.5 mm


CA150-2M *Cable type: IEC228 (BS6360) Sector, Maximum section: 150 mm²*




Type	Ø Stud mm	Øi	B	M	N	L	d	Pack qty	Min. pack qty	Maximum diameter of the stripped cable	Wheelbase
CA150-2M12	12 mm	16.5 mm	32 mm	16 mm	14 mm	141.5 mm	13.2 mm	30	15		

CA150-2M Cable type: IEC228 (BS6360) Round, Maximum section: 150 mm²



Type	Ø Stud mm	Øi	B	M	N	L	d	Pack qty	Min. pack qty	Maximum diameter of the stripped cable	Wheelbase
CA150-2M12	12 mm	16.5 mm	32 mm	16 mm	14 mm	141.5 mm	13.2 mm	30	15		

CA150-2M Cable type: copper round compact, Maximum section: 160 mm²


Type	Ø Stud mm	Øi	B	M	N	L	d	Pack qty	Min. pack qty	Maximum diameter of the stripped cable	Wheelbase
CA150S-2M14	14 mm	16.5 mm	32 mm	18 mm	16 mm	145.5 mm	15 mm	30	15	16.5 mm	44.5 mm


CA150-2M Cable type: copper round compact, Minimum section: 120 mm², Maximum section: 150 mm²


Type	Ø Stud mm	Øi	B	M	N	L	d	Pack qty	Min. pack qty	Maximum diameter of the stripped cable	Wheelbase
CA150R-2M14	14 mm	15 mm	31 mm	18 mm	16 mm	145.5 mm	15 mm	30	15	15 mm	44.5 mm

CA200-2M Cable type: copper sector shaped, Maximum section: 160 mm²



Type	Ø Stud mm	Øi	B	M	N	L	d	Pack qty	Min. pack qty	Maximum diameter of the stripped cable	Wheelbase
CA200R-2M14	14 mm	17 mm	32.5 mm	18 mm	16 mm	145 mm	15 mm	30	15	17 mm	44.5 mm

CA200-2M *Cable type: copper round compact, Maximum section: 200 mm²*




Type	Ø Stud mm	Øi	B	M	N	L	d	Pack qty	Min. pack qty	Maximum diameter of the stripped cable	Wheelbase
CA200R-2M14	14 mm	17 mm	32.5 mm	18 mm	16 mm	145 mm	15 mm	30	15	17 mm	44.5 mm

CA240-2M *Cable type: copper sector shaped, Maximum section: 200 mm²*




Type	Ø Stud mm	Øi	B	M	N	L	d	Pack qty	Min. pack qty	Wheelbase
CA240R-2M14	14 mm	19.2 mm	43 mm	18 mm	16 mm	151.5 mm	15 mm	15	5	44.5 mm

CA240-2M *Cable type: copper round compact, Maximum section: 240 mm²*




Type	Ø Stud mm	Øi	B	M	N	L	d	Pack qty	Min. pack qty	Wheelbase
CA240R-2M14	14 mm	19.2 mm	43 mm	18 mm	16 mm	151.5 mm	15 mm	15	5	44.5 mm

CA315-2M *Cable type: copper sector shaped, Maximum section: 240 mm²*




Type	Ø Stud mm	Øi	B	M	N	L	d	Pack qty	Min. pack qty	Maximum diameter of the stripped cable	Wheelbase
CA315R-2M14	14 mm	21.5 mm	43 mm	18 mm	16 mm	149.5 mm	15 mm	20	5	21.5 mm	44.5 mm

CA315-2M Cable type: copper round compact, Maximum section: 315 mm²



Type	Ø Stud mm	Øi mm	B mm	M mm	N mm	L mm	d mm	Pack qty	Min. pack qty	Maximum diameter of the stripped cable	Wheelbase
CA315R-2M14	14 mm	21.5 mm	43 mm	18 mm	16 mm	149.5 mm	15 mm	20	5	21.5 mm	44.5 mm

CA315-2M Cable type: copper sector shaped, Maximum section: 315 mm²



Type	Ø Stud mm	Øi mm	B mm	M mm	N mm	L mm	d mm	Pack qty	Min. pack qty	Maximum diameter of the stripped cable	Wheelbase
CA315S-2M14	14 mm	23.7 mm	44 mm	18 mm	16 mm	149.5 mm	15 mm	20	5	23.7 mm	44.5 mm