


TERMINAL BLOCK MARKER STRIPS MG-CPMF

precut

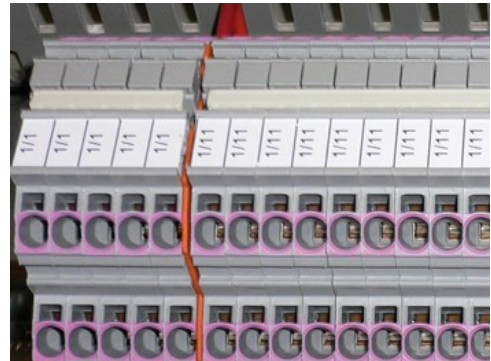

LABORATORY TEST 

CEI EN 60950-1

INDELIBILITY

Information technology equipment - Safety

Part 1: General requirements

§ 1.7.11 Durability

Compliance is checked by inspection and by rubbing the marking by hand for 15 s with a piece of cloth soaked with water and again for 15 s with a piece of cloth soaked with hexane.

After this test, the marking shall be legible; it shall not be possible to remove marking plates easily and they shall show no curling.

CEI EN 61010-1

INDELIBILITY

Ed.2 equivalent to VDE 0411-1

Safety indications for electric devices for measurement, control and laboratory use

Part 1: General indications

This regulation requires that both material and the print shall withstand, cleaning with chemical agents commonly used in industry.

By rubbing manually by hand, without excessive pressure, for 30 seconds with a cloth soaked in the specific detergent or, if not specified, Isopropyl Alcohol.

CEMBRE STANDARD

INDELIBILITY

This test was created to simulate cleaning with chemical products commonly used on various surfaces.

By wiping with a cloth soaked in 95% Ethanol 30 times and making a visual inspection after every 10 passes.

DIN 30643

TERMINAL BLOCK MARKER STRIPS MG-CPMF

Technical characteristics

Geometric shape	rectangular with square corners
Precut	yes
Silicon free	yes



TERMINAL BLOCK MARKER STRIPS MG-CPMF

List of products

MG-CPMF.

Material Rigid PVC
 UL94 class HB
 Min operating temperature range -30 °C
 Max operating temperature range 60 °C

Type	Colour	Height	Length	Quantity per sheet	Pack qty	SWcode
MG-CPMF 43094	White	5.2 mm	105 mm	20	1,000	551
MG-CPMF 43044	Yellow	5.2 mm	105 mm	20	1,000	551
MG-CPMF 43092	White	6.3 mm	105 mm	15	750	553
MG-CPMF 43042	Yellow	6.3 mm	105 mm	15	750	553
MG-CPMF 43091	White	7.6 mm	105 mm	12	600	552
MG-CPMF 43041	Yellow	7.6 mm	105 mm	12	600	552
MG-CPMF 43097N	White	9.8 mm	105 mm	11	550	549
MG-CPMF 43047N	Yellow	9.8 mm	105 mm	11	550	549
MG-CPMF 43090	White	10 mm	105 mm	10	500	530
MG-CPMF 43040	Yellow	10 mm	105 mm	10	500	530
MG-CPMF 43093	White	10.5 mm	105 mm	10	500	554
MG-CPMF 43043	Yellow	10.5 mm	105 mm	10	500	554

MG-CPMFA

Material PVC film
 UL94 class V0
 Min operating temperature range -30 °C
 Max operating temperature range 70 °C
 Adhesive yes

Type	Colour	Height	Length	Quantity per sheet	Pack qty	SWcode
MG-CPMF 46990	White	10 mm	105 mm	10	500	530
MG-CPMF 46940	Yellow	10 mm	105 mm	10	500	530
MG-CPMFA 43196N	White	12 mm	105 mm	8	400	932
MG-CPMFA 43146N	Yellow	12 mm	105 mm	8	400	932

MG-CPMF-HF

Material	Polycarbonate
Min operating temperature range	-40 °C
Max operating temperature range	130 °C
Halogen Free	yes
UL94 class	V0

Type	Height	Length	Quantity per sheet	Pack qty	SWcode	Colour
MG-CPMF 43093-HF	10.5 mm	105 mm	10	500	554	White
MG-CPMF 43091-HF	7.6 mm	105 mm	12	600	552	White