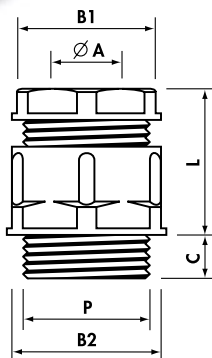


**COMPRESSION CABLE GLANDS
POLYAMIDE PA6 - 1700 SERIES**

Pg thread DIN 40 430 - Dimensions DIN 46 320

Ref. Light Grey	P	Fixing Hole (mm)	Ø A min-max (mm)	B1 Spanner (mm)	B2 Spanner (mm)	C (mm)	L min-max (mm)	Quantity Box/Bag
1709	Pg 7	12,7	5,5- 7	15	16	8	16-20	300/100
*1700	Pg 9	15,5	6,5- 8,5	17	20	8	19-22	200/100
*1701	Pg11	18,8	8 -10	19	22	8	21-25	100/100
*1702	Pg13,5	20,5	8 -11	21	24	9	22-26	100/100
1703	Pg16	22,6	11 -14	23	27	10	24-33	50/50
1704	Pg21	28,5	14,5-18	30	33	11	25-32	50/25
1705	Pg29	37,2	19 -26	40	42	11	27-32	20/10
1706	Pg36	47,2	30 -34	50	53	14	33-42	10/10
1707	Pg42	54,2	30 -38	55	60	13	37-48	5/5
1708	Pg48	60,0	38 -44	60	65	14,5	37-48	5/5

*Add to Ref: N for Black

Technical details:

MATERIAL :	POLYAMIDE 6
PROTECTION :	IP 54 (EN 60529:1991 / CEI 70-1)
SELF-EXTINGUISHING CLASS :	V0 (UL 94)
TEMPERATURE RANGE :	-20°C ÷ +90°C (continuous)
GLOW-WIRE TEST (2 mm) :	960°C (EN 60695-2-1/1:1996 / CEI 89-13)

Resistance to chemical:

STRONG ACIDS - not resistant
 SOFT ALKALINES - not resistant
 STRONG ALKALINES - not resistant
 IDROCARBONS - resistant
 CHLORIDES - not resistant
 ALCOHOLS - resistant
 KETONES - resistant

Cembre SpA

Via Serenissima, 9 - 25135 Brescia (Italy)
 Tel.: +39 030 36921 - Fax: +39 030 3365766
 Web: www.cembre.com - Email: sales@cembre.com