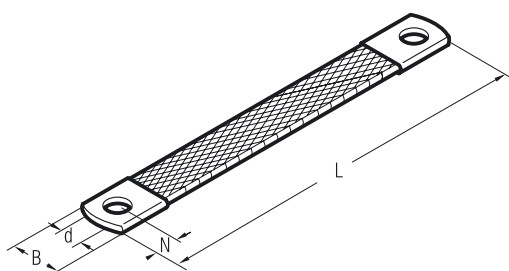


FLEXIBLE BRAIDS


Size sqmm	Ø Stud mm	Ref.	Dimensions mm				Quantity
			B	N	L	d	
10	8	FL 10-150	17	10	150	8,5	50
	8	FL 10-200	17	10	200	8,5	50
	8	FL 10-250	17	10	250	8,5	50
16	8	FL 16-150	17	10	150	8,5	50
	8	FL 16-200	17	10	200	8,5	50
	8	FL 16-250	17	10	250	8,5	50
	8	FL 16-320	17	10	320	8,5	50
	8	FL 16-350	17	10	350	8,5	50
	8	FL 16-420	17	10	420	8,5	25
25	8	FL 16-570	17	10	570	8,5	25
	8	FL 16-660	17	10	660	8,5	25
	8	FL 25-150	21	10	150	8,5	50
	8	FL 25-200	21	10	200	8,5	50
	8	FL 25-250	21	10	250	8,5	50
	8	FL 25-300	21	10	300	8,5	50

Description:

- Flexible braids are manufactured from electrolytic copper wire; the standard finish is bright copper; the ends are tinned to improve the resistance to corrosion due to both, the use in aggressive environment and/or the connection to the various materials that constitute screws and washers normally used.
- Braids of different conductor sizes or lengths are available on request.
- Flexible braids can be supplied tin plated, in this case add the suffix "ST" to reference.

E.g.:

- FL 10-150 (Bright copper)
- FL 10-150-ST (Tin plated).

Cembre SpA

Via Serenissima, 9 - 25135 Brescia (Italy)

Tel.: +39 030 36921 - Fax: +39 030 3365766

Web: www.cembre.com - Email: info@cembre.com