
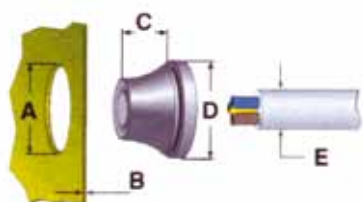


RUTASEAL GROMMETS

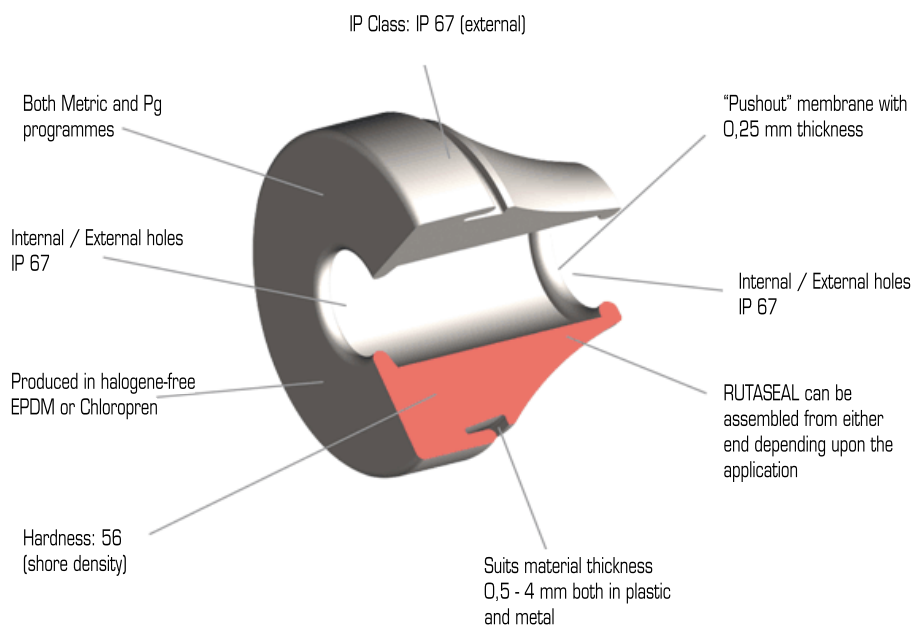

Ref.	Fits Threaded Entry	Dimensions					Quantity Box/Bag
		A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	
RS0407.M12	M12	12,5	0,5 - 2	5,6	20,0	4 - 7	2.000/50
RS0509.M16	M16	16,5	1 - 4	11,0	21,0	5 - 9	2.000/50
RS0813.M20	M20/Pg13,5	20,5	1 - 4	13,4	25,5	8 - 13	3.000/50
RS1117.M25	M25	25,5	1 - 4	15,3	30,5	11 - 17	2.000/50
RS1520.M32	M32	32,5	1 - 4	18,6	38,5	15 - 20	1.000/25
RS1928.M40	M40	40,5	1 - 4	21,7	48,5	19 - 28	600/25
RS2735.M50	M50	50,5	1 - 4	25,0	60,5	27 - 35	250/10

Ref.	Fits Threaded Entry	Dimensions					Quantity Box/Bag
		A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	
RS0305.07	Pg 7	12,5	0,5 - 2	5,4	20,0	3 - 5	2.000/50
RS0507.09	Pg 9	16,0	1 - 4	10,3	21,0	5 - 7	2.000/50
RS0710.11	Pg11	19,0	1 - 4	12,7	24,0	7 - 10	3.000/50
RS1014.16	Pg16	23,0	1 - 4	14,7	28,0	10 - 14	2.000/50
RS1420.21	Pg21	29,0	1 - 4	17,6	35,0	14 - 20	1.000/25
RS2026.29	Pg29	38,0	1 - 4	20,0	46,0	20 - 26	600/25
RS2635.36	Pg36	48,0	1 - 4	23,9	58,0	26 - 35	250/10

Technical features:

MATERIAL:

EPDM halogen-free and chemical resistant

TEMPERATURE RANGE:

-40°C to +110°C

PROTECTION:

IP 67

COLOUR:

RAL 7001 light grey

APPLICATION:

IP67 sealing of cables and conduits in Metric and Pg threaded entries through material thickness 0,5-4 mm

Cembre SpA

Via Serenissima, 9 - 25135 Brescia (Italy)

Tel.: +39 030 36921 - Fax: +39 030 3365766

Web: www.cembre.com - Email: info@cembre.com