



PLC LEGENDS MG-PLC

precut

Legends replace the strips supplied with the devices and automatically print at the correct spacing. Thickness of legend 12,7x50 mm: 0,2 mm.
Consult us for availability of other colours.

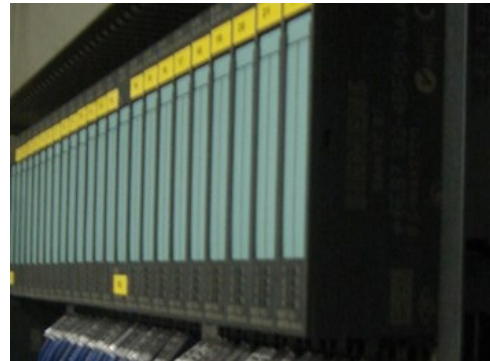

CERTIFICATES 

 2011/65/EU

LABORATORY TEST 

CEI EN 60950-1

INDELIBILITY

Information technology equipment - Safety

Part 1: General requirements

§ 1.7.11 Durability

Compliance is checked by inspection and by rubbing the marking by hand for 15 s with a piece of cloth soaked with water and again for 15 s with a piece of cloth soaked with hexane.

After this test, the marking shall be legible; it shall not be possible to remove marking plates easily and they shall show no curling.

CEI EN 61010-1

INDELIBILITY

Ed.2 equivalent to VDE 0411-1

Safety indications for electric devices for measurement, control and laboratory use

Part 1: General indications

This regulation requires that both material and the print shall withstand, cleaning with chemical agents commonly used in industry.

By rubbing manually by hand, without excessive pressure, for 30 seconds with a cloth soaked in the specific detergent or, if not specified, Isopropyl Alcohol.

CEMBRE STANDARD

INDELIBILITY

This test was created to simulate cleaning with chemical products commonly used on various surfaces.


By wiping with a cloth soaked in 95% Ethanol 30 times and making a visual inspection after every 10 passes.

DIN 30643

PLC LEGENDS MG-PLC

Technical characteristics

Geometric shape	rectangular with square corners
Precut	yes

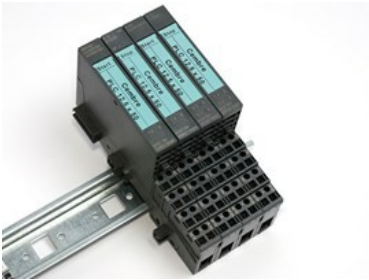

PLC LEGENDS MG-PLC

List of products

MG-PLC.							
Material							Rigid PVC
UL94 class							V0
Max application temperature							140 °F
Min application temperature							-22 °F
Type	Color	Height	Length	Thickness	Quantity per sheet	Pack qty	SWcode
71090	White	0.69 in.	4.07 in.	0.02 in.	6	60	882
71040	Yellow	0.69 in.	4.07 in.	0.02 in.	6	60	882
71050	Siemens green	0.69 in.	4.07 in.	0.02 in.	6	60	882
71047	Yellow	0.87 in.	1.5 in.	0.02 in.	10	100	904
71091	White	0.9 in.	4.07 in.	0.02 in.	4	40	883
71041	Yellow	0.9 in.	4.07 in.	0.02 in.	4	40	883
71051	Siemens green	0.9 in.	4.07 in.	0.02 in.	4	40	883
71092	White	0.5 in.	1.97 in.	0.01 in.	14	140	885
71042	Yellow	0.5 in.	1.97 in.	0.01 in.	14	140	885
71052	Siemens green	0.5 in.	1.97 in.	0.01 in.	14	140	885
71002GY	Grey	0.5 in.	1.97 in.	0.01 in.	14	140	885
71094	White	1.01 in.	1.97 in.	0.01 in.	8	80	895
71044	Yellow	1.01 in.	1.97 in.	0.01 in.	8	80	895
71099	White	0.5 in.	4.29 in.	0.01 in.	8	80	897
71049	Yellow	0.5 in.	4.29 in.	0.01 in.	8	80	897
71059	Siemens green	0.5 in.	4.29 in.	0.01 in.	8	80	897
71009GY	Grey	0.5 in.	4.29 in.	0.01 in.	8	80	897
71096	White	0.9 in.	4.29 in.	0.02 in.	4	40	896
71046	Yellow	0.9 in.	4.29 in.	0.02 in.	4	40	896
71056	Siemens green	0.9 in.	4.29 in.	0.02 in.	4	40	896
71098	White	0.5 in.	1.22 in.	0.01 in.	21	210	900
71048	Yellow	0.5 in.	1.22 in.	0.01 in.	21	210	900
71058	Siemens green	0.5 in.	1.22 in.	0.01 in.	21	210	900
71008GY	Grey	0.5 in.	1.22 in.	0.01 in.	21	210	900
71053	Siemens green	2.05 in.	3.15 in.	0.01 in.	2	20	889

MG-PLC-HF

Material	Polycarbonate
UL94 class	V0
Halogen Free	yes
Max operating temperature range	266 °F
Min operating temperature range	-40 °F

Type	Color	Height	Length	Thickness	Quantity per sheet	Pack qty	SWcode
71000-HF	Metallic grey	0.69 in.	4.07 in.	0.02 in.	6	60	882
71001-HF	Metallic grey	0.9 in.	4.07 in.	0.02 in.	4	40	883