

PANEL PLATES MG-VRT-R


rivet fixing, customisable

MG-VRT-R rigid PVC panel plates are used to create name plates, rating plates, data plates using company logos, technical data, serial numbers, EC certification, etc. CPT transparent Polycarbonate covers can be used for increased durability. Consult us for availability of other colours and transparent versions.

Note: UV resistance may vary between colours.



CERTIFICATES 

 2011/65/EU

LABORATORY TEST 

CEI EN 60950-1

INDELIBILITY

Information technology equipment - Safety

Part 1: General requirements

§ 1.7.11 Durability

Compliance is checked by inspection and by rubbing the marking by hand for 15 s with a piece of cloth soaked with water and again for 15 s with a piece of cloth soaked with hexane.

After this test, the marking shall be legible; it shall not be possible to remove marking plates easily and they shall show no curling.

CEI EN 61010-1

INDELIBILITY

Ed.2 equivalent to VDE 0411-1

Safety indications for electric devices for measurement, control and laboratory use

Part 1: General indications

This regulation requires that both material and the print shall withstand, cleaning with chemical agents commonly used in industry.

By rubbing manually by hand, without excessive pressure, for 30 seconds with a cloth soaked in the specific detergent or, if not specified, Isopropyl Alcohol.

CEMBRE STANDARD

INDELIBILITY

This test was created to simulate cleaning with chemical products commonly used on various surfaces.


By wiping with a cloth soaked in 95% Ethanol 30 times and making a visual inspection after every 10 passes.

DIN 30643

PANEL PLATES MG-VRT-R

Technical characteristics

Geometric shape	rectangular with square corners
Material	Rigid PVC
Silicon free	yes
UL94 class	V0
Min operating temperature range	-22 °F
Max operating temperature range	140 °F
Min application temperature	50 °F
Max application temperature	104 °F
Rivet fixing	yes

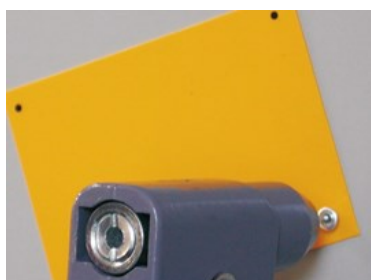

PANEL PLATES MG-VRT-R

List of products

MG-VRT-R						
Type	Height	Length	Quantity per sheet	Pack qty	SWcode	Color
48946	0.98 in.	5.51 in.	4	100	824	White
48905	0.98 in.	5.51 in.	4	100	824	White
48428	4.02 in.	5.43 in.	1	50	207	Yellow
48728GY	4.02 in.	5.43 in.	1	50	207	Grey
48228	4.02 in.	5.43 in.	1	50	207	Red
48128	4.02 in.	5.43 in.	1	50	207	Black
48297	1.97 in.	3.94 in.	2	50	844	Red
48217	1.38 in.	3.94 in.	3	75	810	Red
48908	0.98 in.	3.15 in.	4	200	861	White
48408	0.98 in.	3.15 in.	4	200	861	Yellow
48405	0.98 in.	3.94 in.	4	200	205	Yellow
48929	1.18 in.	2.76 in.	3	150	820	White
48918	1.97 in.	1.97 in.	1	200	858	White
48418	1.97 in.	1.97 in.	1	200	858	Yellow
48941	2.36 in.	3.94 in.	1	50	821	White
48900N	1.26 in.	2.28 in.	6	300	200	White
48400N	1.26 in.	2.28 in.	6	300	200	Yellow
48700NGY	1.26 in.	2.28 in.	6	300	200	Grey
48901	1.65 in.	3.07 in.	2	100	202	White
48401	1.65 in.	3.07 in.	2	100	202	Yellow
48701GY	1.65 in.	3.07 in.	2	100	202	Grey
48917	1.38 in.	3.94 in.	3	75	810	White
48417	1.38 in.	3.94 in.	3	75	810	Yellow
48717GY	1.38 in.	3.94 in.	3	75	810	Grey
48997	1.97 in.	3.94 in.	2	50	844	White
48903	2.05 in.	4.21 in.	2	100	204	White
48403	2.05 in.	4.21 in.	2	100	204	Yellow
48703GY	2.05 in.	4.21 in.	2	100	204	Grey
48223	2.05 in.	4.21 in.	2	100	204	Red

48103	2.05 in.	4.21 in.	2	100	204	Black
48902	2.44 in.	3.46 in.	1	50	203	White
48402	2.44 in.	3.46 in.	1	50	203	Yellow
48702GY	2.44 in.	3.46 in.	1	50	203	Grey
48913	3.62 in.	4.65 in.	1	50	813	White
48413	3.62 in.	4.65 in.	1	50	813	Yellow
48713GY	3.62 in.	4.65 in.	1	50	813	Grey
48213	3.62 in.	4.65 in.	1	50	813	Red
48513	3.62 in.	4.65 in.	1	50	813	Green
48113	3.62 in.	4.65 in.	1	50	813	Black
48928	4.02 in.	5.43 in.	1	50	207	White