



F-P




CERTIFICATES 

 According to UL 486A standard (file E125401)  BT 2006/95/CE

F-P

Technical characteristics


Easy entry	yes
Min operating temperature range	-4 °F
Max operating temperature range	176 °F
Max operating temperature range (surge)	194 °F
Dimensional form	Pin terminal
Material (Body)	Electrolytic copper
Material (Partially reinforced)	PVC

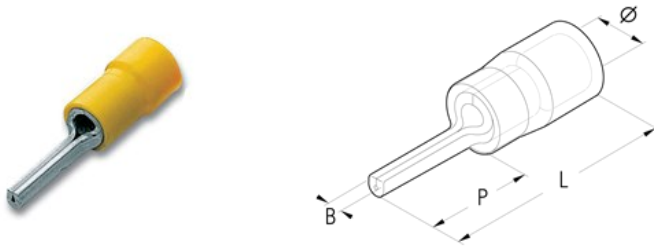





F-P


List of products





RF-P Cable type: copper, Minimum section: 22 AWG, Maximum section: 16 AWG








	Type	Color	Ø	B	P	L	Pack qty	Min. pack qty	
	RVF-P8	Red	0.15 in.	0.06 in.	0.31 in.	0.7 in.	3,500	100	
	RVF-P10	Red	0.15 in.	0.06 in.	0.39 in.	0.78 in.	3,500	100	
	RVF-P12	Red	0.15 in.	0.06 in.	0.47 in.	0.87 in.	3,500	100	


RF-P Cable type: flexible copper, Minimum section: 22 AWG, Maximum section: 16 AWG








	Type	Color	Ø	B	P	L	Pack qty	Min. pack qty	
	RVF-P8	Red	0.15 in.	0.06 in.	0.31 in.	0.7 in.	3,500	100	
	RVF-P10	Red	0.15 in.	0.06 in.	0.39 in.	0.78 in.	3,500	100	
	RVF-P12	Red	0.15 in.	0.06 in.	0.47 in.	0.87 in.	3,500	100	





BF-P Cable type: copper, Minimum section: 16 AWG, Maximum section: 14 AWG


	Type	Color	Ø	B	P	L	Pack qty	Min. pack qty	
	BVF-P8	Blue	0.19 in.	0.07 in.	0.31 in.	0.7 in.	3,000	100	
	BVF-P10	Blue	0.19 in.	0.07 in.	0.39 in.	0.78 in.	3,000	100	
	BVF-P12	Blue	0.19 in.	0.07 in.	0.47 in.	0.86 in.	3,000	100	


BF-P Cable type: flexible copper, Minimum section: 16 AWG, Maximum section: 15 AWG





	Type	Color	Ø	B	P	L	Pack qty	Min. pack qty	
	BVF-P8	Blue	0.19 in.	0.07 in.	0.31 in.	0.7 in.	3,000	100	
	BVF-P10	Blue	0.19 in.	0.07 in.	0.39 in.	0.78 in.	3,000	100	
	BVF-P12	Blue	0.19 in.	0.07 in.	0.47 in.	0.86 in.	3,000	100	

GF-P Cable type: flexible copper, Minimum section: 12 AWG, Maximum section: 10 AWG


	Type	Color	Ø	B	P	L	Pack qty	Min. pack qty	
	YVF-P10	Yellow	0.26 in.	0.09 in.	0.39 in.	0.97 in.	1,500	100	
	YVF-P12	Yellow	0.26 in.	0.09 in.	0.47 in.	1.06 in.	1,500	100	
	YVF-P14	Yellow	0.26 in.	0.09 in.	0.55 in.	1.13 in.	1,500	100	

GF-P Cable type: copper, Minimum section: 12 AWG, Maximum section: 10 AWG



	Type	Color	Ø	B	P	L	Pack qty	Min. pack qty	
	YVF-P10	Yellow	0.26 in.	0.09 in.	0.39 in.	0.97 in.	1,500	100	
	YVF-P12	Yellow	0.26 in.	0.09 in.	0.47 in.	1.06 in.	1,500	100	
	YVF-P14	Yellow	0.26 in.	0.09 in.	0.55 in.	1.13 in.	1,500	100	