



F-U




CERTIFICATES 

 According to UL 486A standard (file E125401)  BT 2006/95/CE

F-U

Technical characteristics


Easy entry	yes
Min operating temperature range	-4 °F
Max operating temperature range	176 °F
Max operating temperature range (surge)	194 °F
Dimensional form	Fork/spade terminal
Material (Body)	Electrolytic copper
Material (Partially reinforced)	PVC

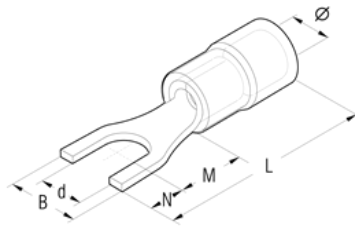

F-U


List of products










RF-U Cable type: flexible copper, Minimum section: 22 AWG, Maximum section: 16 AWG




	Type	Color	Ø	B	M	N	L	d	Pack qty	Min. pack qty	
	RVF-F4	Red	0.15 in.	0.22 in.	0.22 in.	0.16 in.	0.77 in.	0.13 in.	3,500	100	
	RVF-F6	Red	0.15 in.	0.24 in.	0.26 in.	0.15 in.	0.8 in.	0.15 in.	3,500	100	
	RVF-F8	Red	0.15 in.	0.26 in.	0.3 in.	0.15 in.	0.84 in.	0.17 in.	3,000	100	
	RVF-F10	Red	0.15 in.	0.33 in.	0.3 in.	0.15 in.	0.84 in.	0.21 in.	3,000	100	
	RVF-F14	Red	0.15 in.	0.37 in.	0.32 in.	0.19 in.	0.9 in.	0.25 in.	2,500	100	
	RVF-F516	Red	0.15 in.	0.55 in.	0.39 in.	0.25 in.	1.04 in.	0.33 in.	2,000	100	
	RVF-F12	Red	0.15 in.	0.69 in.	0.51 in.	0.3 in.	1.22 in.	0.41 in.	1,500	100	
	RVF-F38	Red	0.15 in.	0.79 in.	0.61 in.	0.35 in.	1.36 in.	0.51 in.	1,500	100	

RF-U Cable type: copper, Minimum section: 22 AWG, Maximum section: 16 AWG




	Type	Color	Ø	B	M	N	L	d	Pack qty	Min. pack qty	
	RVF-F4	Red	0.15 in.	0.22 in.	0.22 in.	0.16 in.	0.77 in.	0.13 in.	3,500	100	
	RVF-F6	Red	0.15 in.	0.24 in.	0.26 in.	0.15 in.	0.8 in.	0.15 in.	3,500	100	
	RVF-F8	Red	0.15 in.	0.26 in.	0.3 in.	0.15 in.	0.84 in.	0.17 in.	3,000	100	
	RVF-F10	Red	0.15 in.	0.33 in.	0.3 in.	0.15 in.	0.84 in.	0.21 in.	3,000	100	
	RVF-F14	Red	0.15 in.	0.37 in.	0.32 in.	0.19 in.	0.9 in.	0.25 in.	2,500	100	
	RVF-F516	Red	0.15 in.	0.55 in.	0.39 in.	0.25 in.	1.04 in.	0.33 in.	2,000	100	
	RVF-F12	Red	0.15 in.	0.69 in.	0.51 in.	0.3 in.	1.22 in.	0.41 in.	1,500	100	
	RVF-F38	Red	0.15 in.	0.79 in.	0.61 in.	0.35 in.	1.36 in.	0.51 in.	1,500	100	


BF-U Cable type: copper, Minimum section: 16 AWG, Maximum section: 14 AWG














	Type	Color	Ø	B	M	N	L	d	Pack qty	Min. pack qty	
	BVF-F4	Blue	0.19 in.	0.22 in.	0.22 in.	0.16 in.	0.77 in.	0.13 in.	2,500	100	
	BVF-F6	Blue	0.19 in.	0.25 in.	0.26 in.	0.15 in.	0.8 in.	0.15 in.	2,500	100	
	BVF-F8	Blue	0.19 in.	0.26 in.	0.3 in.	0.15 in.	0.84 in.	0.17 in.	2,500	100	
	BVF-F10	Blue	0.19 in.	0.33 in.	0.3 in.	0.15 in.	0.84 in.	0.21 in.	2,500	100	
	BVF-F14	Blue	0.19 in.	0.37 in.	0.32 in.	0.19 in.	0.9 in.	0.25 in.	2,500	100	
	BVF-F516	Blue	0.19 in.	0.55 in.	0.39 in.	0.25 in.	1.04 in.	0.33 in.	1,500	100	
	BVF-F12	Blue	0.19 in.	0.69 in.	0.51 in.	0.3 in.	1.22 in.	0.41 in.	1,000	100	
	BVF-F38	Blue	0.19 in.	0.79 in.	0.61 in.	0.35 in.	1.36 in.	0.51 in.	1,500	100	










BF-U Cable type: flexible copper, Minimum section: 16 AWG, Maximum section: 15 AWG


	Type	Color	Ø	B	M	N	L	d	Pack qty	Min. pack qty	
	BVF-F4	Blue	0.19 in.	0.22 in.	0.22 in.	0.16 in.	0.77 in.	0.13 in.	2,500	100	
	BVF-F6	Blue	0.19 in.	0.25 in.	0.26 in.	0.15 in.	0.8 in.	0.15 in.	2,500	100	
	BVF-F8	Blue	0.19 in.	0.26 in.	0.3 in.	0.15 in.	0.84 in.	0.17 in.	2,500	100	
	BVF-F10	Blue	0.19 in.	0.33 in.	0.3 in.	0.15 in.	0.84 in.	0.21 in.	2,500	100	
	BVF-F14	Blue	0.19 in.	0.37 in.	0.32 in.	0.19 in.	0.9 in.	0.25 in.	2,500	100	
	BVF-F516	Blue	0.19 in.	0.55 in.	0.39 in.	0.25 in.	1.04 in.	0.33 in.	1,500	100	
	BVF-F12	Blue	0.19 in.	0.69 in.	0.51 in.	0.3 in.	1.22 in.	0.41 in.	1,000	100	
	BVF-F38	Blue	0.19 in.	0.79 in.	0.61 in.	0.35 in.	1.36 in.	0.51 in.	1,500	100	

GF-U Cable type: copper, Minimum section: 12 AWG, Maximum section: 10 AWG


	Type	Color	Ø	B	M	N	L	d	Pack qty	Min. pack qty	
	YVF-F6	Yellow	0.26 in.	0.3 in.	0.33 in.	0.15 in.	1.05 in.	0.15 in.	1,500	100	
	YVF-F8	Yellow	0.26 in.	0.3 in.	0.31 in.	0.17 in.	1.05 in.	0.17 in.	1,000	100	
	YVF-F10	Yellow	0.26 in.	0.37 in.	0.31 in.	0.17 in.	1.05 in.	0.21 in.	1,000	100	
	YVF-F14	Yellow	0.26 in.	0.39 in.	0.43 in.	0.22 in.	1.21 in.	0.25 in.	1,000	100	
	YVF-F516	Yellow	0.26 in.	0.53 in.	0.47 in.	0.31 in.	1.35 in.	0.33 in.	1,000	100	
	YVF-F38	Yellow	0.26 in.	0.61 in.	0.51 in.	0.31 in.	1.39 in.	0.41 in.	1,000	100	
	YVF-F12	Yellow	0.26 in.	0.83 in.	0.59 in.	0.37 in.	1.53 in.	0.51 in.	1,000	100	
	YVF-F916	Yellow	0.26 in.	0.91 in.	0.63 in.	0.41 in.	1.61 in.	0.59 in.	500	100	
	YVF-F58	Yellow	0.26 in.	1.02 in.	0.67 in.	0.45 in.	1.69 in.	0.67 in.	500	100	

GF-U Cable type: flexible copper, Minimum section: 12 AWG, Maximum section: 10 AWG


	Type	Color	Ø	B	M	N	L	d	Pack qty	Min. pack qty	
	YVF-F6	Yellow	0.26 in.	0.3 in.	0.33 in.	0.15 in.	1.05 in.	0.15 in.	1,500	100	
	YVF-F8	Yellow	0.26 in.	0.3 in.	0.31 in.	0.17 in.	1.05 in.	0.17 in.	1,000	100	
	YVF-F10	Yellow	0.26 in.	0.37 in.	0.31 in.	0.17 in.	1.05 in.	0.21 in.	1,000	100	
	YVF-F14	Yellow	0.26 in.	0.39 in.	0.43 in.	0.22 in.	1.21 in.	0.25 in.	1,000	100	
	YVF-F516	Yellow	0.26 in.	0.53 in.	0.47 in.	0.31 in.	1.35 in.	0.33 in.	1,000	100	
	YVF-F38	Yellow	0.26 in.	0.61 in.	0.51 in.	0.31 in.	1.39 in.	0.41 in.	1,000	100	
	YVF-F12	Yellow	0.26 in.	0.83 in.	0.59 in.	0.37 in.	1.53 in.	0.51 in.	1,000	100	
	YVF-F916	Yellow	0.26 in.	0.91 in.	0.63 in.	0.41 in.	1.61 in.	0.59 in.	500	100	
	YVF-F58	Yellow	0.26 in.	1.02 in.	0.67 in.	0.45 in.	1.69 in.	0.67 in.	500	100	