





PL-M




CERTIFICATES 

 BT 2006/95/CE  According to UL 486A standard (file E125401)  2011/65/EU

PL-M

Technical characteristics


Dimensional form	Butt
Min operating temperature range	-4 °F
Max operating temperature range	176 °F
Max operating temperature range (surge)	194 °F

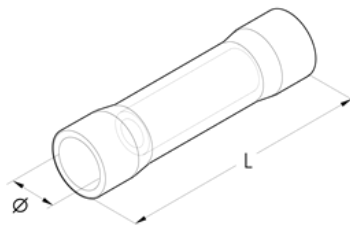

PL-M


List of products

PL-M Cable type: flexible copper, Minimum section: 22 AWG, Maximum section: 16 AWG




Type	Color	Ø	L	Pack qty	Min. pack qty
RV-BS			0.98 in.		

PL-M Cable type: copper, Minimum section: 22 AWG, Maximum section: 16 AWG




Type	Color	Ø	L	Pack qty	Min. pack qty
RV-BS			0.98 in.		

PL-M Cable type: flexible copper, Minimum section: 12 AWG, Maximum section: 10 AWG



Type	Color	Ø	L	Pack qty	Min. pack qty
YV-BS			1.26 in.		

PL-M Cable type: copper, Minimum section: 12 AWG, Maximum section: 10 AWG



Type	Color	Ø	L	Pack qty	Min. pack qty
YV-BS			1.26 in.		