

NYLON INSULATED PIN TERMINALS ANE-P

ANE-P series terminals are made from electrolytic copper, rolled, tin plated and brazed. The interior of the Nylon insulation sleeve is funnel shaped so as to ensure complete and easy introduction of the conductor strands. In order to achieve the best electrical and mechanical performance it is suggested that they are crimped using dies and tools specifically developed for this purpose by Cembre.

“ANE-P” type terminals are manufactured from electrolytic Copper Cu-ETP CWO04A according to UNI EN 13599 and are tin plated to a minimum thickness of 3m.



CERTIFICATES 




2011/65/EU

NYLON INSULATED PIN TERMINALS ANE-P

Technical characteristics

Min operating temperature range	-4 °F
Max operating temperature range	239 °F
Max operating temperature range (surge)	266 °F
Material (Body)	ETP Copper electrolytically tinned
Material (Partially reinforced)	Polyamide PA6.6

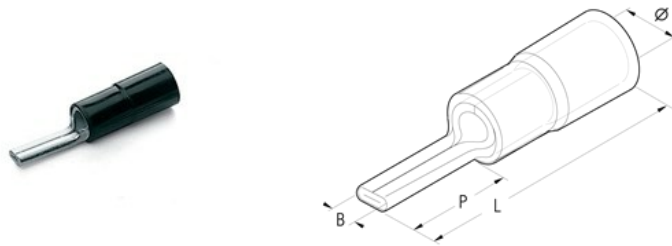

NYLON INSULATED PIN TERMINALS ANE-P

List of products

ANE-P Cable type: flexible copper, Maximum section: 8 AWG




Type	Ø	B	P	L	Pack qty	Min. pack qty
ANE2-P12	0.31 in.	0.17 in.	0.57 in.	1.38 in.	500	100

ANE-P Cable type: copper, Maximum section: 8 AWG




Type	Ø	B	P	L	Pack qty	Min. pack qty
ANE2-P12	0.31 in.	0.17 in.	0.57 in.	1.38 in.	500	100

ANE-P Cable type: flexible copper, Maximum section: 6 AWG



Type	Ø	B	P	L	Pack qty	Min. pack qty
ANE3-P14	0.36 in.	0.22 in.	0.71 in.	1.62 in.	400	100

ANE-P Cable type: copper, Maximum section: 6 AWG



Type	Ø	B	P	L	Pack qty	Min. pack qty
ANE3-P14	0.36 in.	0.22 in.	0.71 in.	1.62 in.	400	100

ANE-P Cable type: flexible copper, Maximum section: 4 AWG



Type	Ø	B	P	L	Pack qty	Min. pack qty
ANE5-P16	0.44 in.	0.28 in.	0.8 in.	1.77 in.	300	100

ANE-P Cable type: copper, Maximum section: 4 AWG




Type	Ø	B	P	L	Pack qty	Min. pack qty
ANE5-P16	0.44 in.	0.28 in.	0.8 in.	1.77 in.	300	100

ANE-P Cable type: flexible copper, Maximum section: 2 AWG



Type	Ø	B	P	L	Pack qty	Min. pack qty
ANE7-P20	0.54 in.	0.31 in.	0.96 in.	2.17 in.	150	50

ANE-P Cable type: copper, Maximum section: 2 AWG



Type	Ø	B	P	L	Pack qty	Min. pack qty
ANE7-P20	0.54 in.	0.31 in.	0.96 in.	2.17 in.	150	50