


## COLOR CODED SPLICES BSCL

### *long barrel*

BSCL range of connectors are manufactured from electrolytic copper tube Cu-OF CW008A conform to UNI EN 13600. Made of electrolytic copper tube having the same dimension as C and CL series lugs, BSCL connectors are annealed and electrolytically tin plated. They feature an internal taper at both ends to ease the introduction of the conductor and a central stop to ensure correct positioning. UL listed for US and Canada per UL486A up to 35 KV.



CERTIFICATES 

 **UL** US E125401

 **RoHS**  
COMPLIANT  
2011/65/EU


2011/65/EU

# COLOR CODED SPLICES BSCL

## *Technical characteristics*

Material (Body)

ETP Copper electrolytically tinned

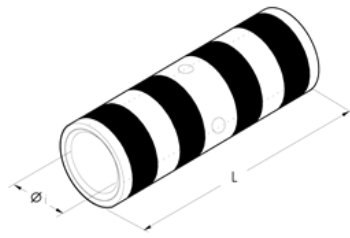

# COLOR CODED SPLICES BSCL

## List of products

<b>BSCL</b>					
Type	Color	Øi	L	Pack qty	Min. pack qty
BSCL8	Red	0.18 in.	1.99 in.	600	150
BSCL6	Blue	0.23 in.	1.99 in.	400	100
BSCL4	Grey	0.24 in.	26 in.	200	100
BSCL3	White	0.28 in.	2.38 in.	200	50
BSCL2	Brown	0.3 in.	2.38 in.	200	50
BSCL1	Green	0.35 in.	2.58 in.	200	50
BSCL1/0	Pink	0.39 in.	2.87 in.	200	50
BSCL2/0	Black	0.44 in.	3.11 in.	100	50
BSCL3/0	Orange	0.49 in.	3.11 in.	80	40
BSCL4/0	Purple	0.53 in.	3.37 in.	50	25
BSCL250	Yellow	0.6 in.	3.37 in.	50	25
BSCL300	White	0.66 in.	4.11 in.	40	20
BSCL350	Red	0.69 in.	4.11 in.	40	20
BSCL400	Blue	0.76 in.	4.37 in.	20	10
BSCL500	Brown	0.83 in.	4.61 in.	20	10
BSCL600	Green	0.93 in.	5.49 in.	20	10
BSCL750	Black	1.02 in.	5.87 in.	10	10

