

END TO END CONNECTORS V-BS

PVC insulated

Manufactured from copper tube
Electrolytically tin plated



END TO END CONNECTORS V-BS


Technical characteristics

Material (Body)

Tinned electrolytic copper electrolytically

Material (Insulated)


PVC

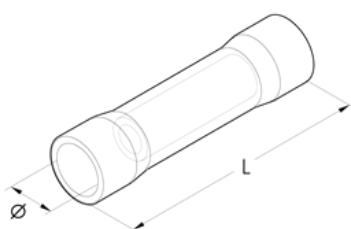

END TO END CONNECTORS V-BS


List of products

V-BS Cable type: copper, Minimum section: 22 AWG, Maximum section: 16 AWG




Type	L	Ø	Pack qty	Min. pack qty
RV-BS	0.98 in.	0.16 in.		

V-BS Cable type: flexible copper, Minimum section: 22 AWG, Maximum section: 16 AWG




Type	L	Ø	Pack qty	Min. pack qty
RV-BS	0.98 in.	0.16 in.		

V-BS Cable type: copper, Minimum section: 12 AWG, Maximum section: 10 AWG



Type	L	Ø	Pack qty	Min. pack qty
YV-BS	1.26 in.	0.24 in.		

V-BS Cable type: flexible copper, Minimum section: 12 AWG, Maximum section: 10 AWG



Type	L	Ø	Pack qty	Min. pack qty
YV-BS	1.26 in.	0.24 in.		