

END TO END CONNECTORS N-BS

Nylon insulated

Manufactured from copper tube
Electrolytically tin plated



END TO END CONNECTORS N-BS


Technical characteristics

Material (Body)

Tinned electrolytic copper electrolytically

Material (Insulated)


Nylon

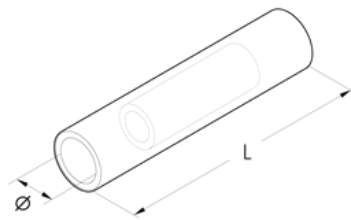

END TO END CONNECTORS N-BS

List of products

N-BS Cable type: copper, Minimum section: 22 AWG, Maximum section: 16 AWG




Type	L	Ø
RN-BS	0.98 in.	0.16 in.

N-BS Cable type: flexible copper, Minimum section: 22 AWG, Maximum section: 16 AWG



Type	L	Ø
RN-BS	0.98 in.	0.16 in.

N-BS Cable type: copper, Minimum section: 16 AWG, Maximum section: 14 AWG



Type	L	Ø
BN-BS	1 in.	0.21 in.

N-BS Cable type: flexible copper, Minimum section: 16 AWG, Maximum section: 15 AWG



Type	L	Ø
BN-BS	1 in.	0.21 in.

N-BS Cable type: flexible copper, Minimum section: 12 AWG, Maximum section: 10 AWG



Type	L	Ø
YN-BS	1.26 in.	0.21 in.

N-BS Cable type: copper, Minimum section: 12 AWG, Maximum section: 10 AWG



Type	L	Ø
YN-BS	1.26 in.	0.21 in.