

# MAXIBRASS CABLE GLANDS METRIC THREAD 2900DP M

*standard, factory fitted with Polyethylene foam discs*


MAXIbrass Cable glands in Nickel plated Brass, standard, factory fitted with Polyethylene foam discs.



# MAXIBRASS CABLE GLANDS METRIC THREAD 2900DP M

## *Technical characteristics*

Material (Body)	Nickel plated brass
Material (Sealing ring)	Neoprene 80 sh A
Material (Cable grip insert)	Polyamide PA6.6
Material (O-Ring)	Butadiene-Nitrile NBR 70 sh A
Material (Foam disc)	Polyethylene PE
Thickness	0.08 in.
IP protection	68
Min application temperature	-13 °F
Max application temperature	212 °F

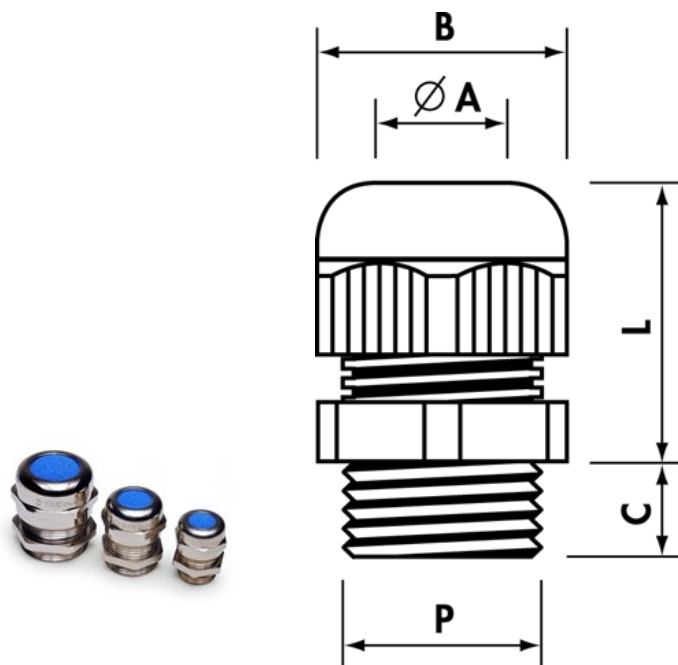


# MAXIBRASS CABLE GLANDS METRIC THREAD

## 2900DP M

### List of products

#### 2900DP M

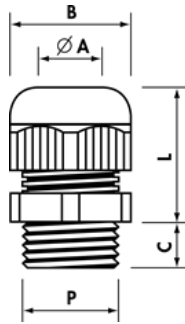

Type	P	Fixing hole diameter	Ø A min	Ø A max	B	E	C	L min	L max	Pack qty
2900DP.M12N	M12X1,5	0.48 in.	0.12 in.	0.28 in.	0.63 in.	0.71 in.	0.26 in.	0.63 in.	0.79 in.	100
2900DP.M16N	M16X1,5	0.64 in.	0.18 in.	0.39 in.	0.79 in.	0.91 in.	0.28 in.	0.79 in.	0.98 in.	100
2900DP.M20N	M20X1,5	0.81 in.	0.28 in.	0.51 in.	0.94 in.	1.06 in.	0.31 in.	0.79 in.	1.06 in.	50
2900DP.M25N	M25X1,5	1 in.	0.39 in.	0.67 in.	1.14 in.	1.26 in.	0.31 in.	0.94 in.	1.18 in.	50
2900DP.M32N	M32X1,5	1.28 in.	0.43 in.	0.83 in.	1.42 in.	1.57 in.	0.35 in.	1.06 in.	1.34 in.	25
2900DP.M40N	M40X1,5	1.59 in.	0.75 in.	1.1 in.	1.77 in.	1.97 in.	0.35 in.	1.34 in.	1.65 in.	10
2900DP.M50N	M50X1,5	1.99 in.	1.02 in.	1.38 in.	2.13 in.	2.36 in.	0.39 in.	1.38 in.	1.69 in.	8
2900DP.M63N	M63X1,5	2.52 in.	1.34 in.	1.77 in.	2.64 in.	2.91 in.	0.59 in.	1.57 in.	2.05 in.	5