

MAXIBRASS CABLE GLANDS PG THREAD 2900DP PG

standard, factory fitted with Polyethylene foam discs


MAXIbrass Cable glands in Nickel plated Brass, standard, factory fitted with Polyethylene foam discs.



MAXIBRASS CABLE GLANDS PG THREAD 2900DP PG

Technical characteristics


Material (Body)	Nickel plated brass
Material (Sealing ring)	Neoprene®
Material (O-Ring)	Butadiene-Nitrile NBR 70 sh A
Material	ABS
Thickness	0.08 in.
IP protection	68
Min operating temperature range	-13 °F
Max operating temperature range	212 °F

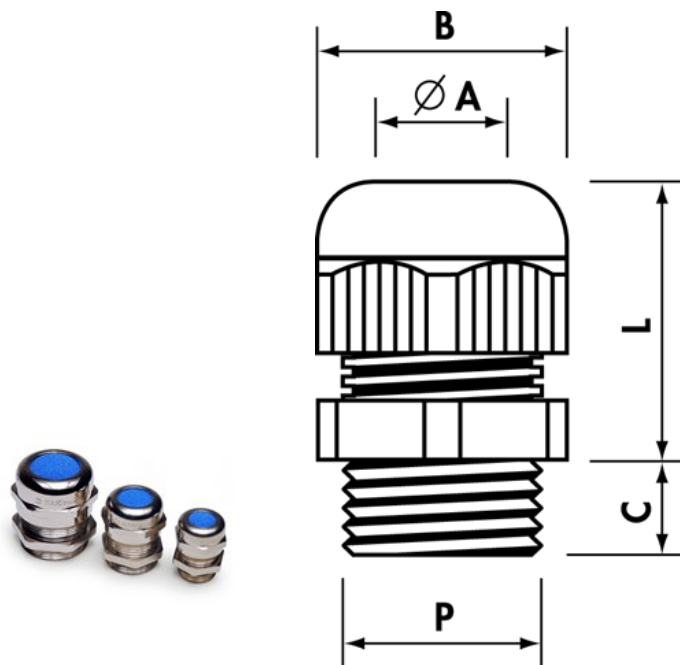

MAXIBRASS CABLE GLANDS PG THREAD 2900DP PG

List of products

2900DP Pg

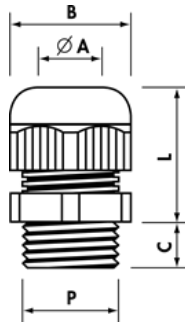

Type	P	Fixing hole diameter	Ø A max	Ø A min	B	E	C	L min	L max	Pack qty
2900DP.07N	Pg7	0.5 in.	0.28 in.	0.12 in.	0.63 in.	0.71 in.	0.2 in.	0.63 in.	0.79 in.	100
2900DP.09N	Pg9	0.61 in.	0.31 in.	0.16 in.	0.67 in.	0.75 in.	0.24 in.	0.67 in.	0.91 in.	100
2900DP.11N	Pg11	0.74 in.	0.39 in.	0.18 in.	0.79 in.	0.91 in.	0.24 in.	0.79 in.	0.98 in.	100
2900DP.13N	Pg13,5	0.81 in.	0.47 in.	0.2 in.	0.87 in.	0.98 in.	0.26 in.	0.79 in.	1.02 in.	50
2900DP.16N	Pg16	0.89 in.	0.51 in.	0.28 in.	0.94 in.	1.06 in.	0.26 in.	0.79 in.	1.06 in.	50
2900DP.21N	Pg21	1.12 in.	0.67 in.	0.39 in.	1.18 in.	1.3 in.	0.28 in.	0.94 in.	1.18 in.	50
2900DP.29N	Pg29	1.46 in.	0.98 in.	0.67 in.	1.57 in.	1.77 in.	0.31 in.	1.18 in.	1.46 in.	25
2900DP.36N	Pg36	1.86 in.	1.26 in.	0.79 in.	1.97 in.	2.17 in.	0.31 in.	1.5 in.	1.89 in.	10
2900DP.42N	Pg42	2.13 in.	1.5 in.	1.1 in.	2.24 in.	2.48 in.	0.39 in.	1.54 in.	1.89 in.	5
2900DP.48N	Pg48	2.36 in.	1.77 in.	1.34 in.	2.64 in.	2.91 in.	0.59 in.	1.57 in.	2.05 in.	5