


9MM LEGENDS TAR-ROLL

on a reel

TAR-ROLL tags are used for marking cables, conduit, tubes, conductors and components.

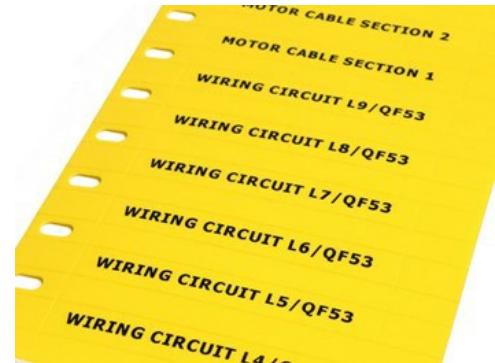

CERTIFICATES 

 2011/65/EU

LABORATORY TEST 

CEI EN 60950-1

INDELIBILITY

Information technology equipment - Safety

Part 1: General requirements

§ 1.7.11 Durability

Compliance is checked by inspection and by rubbing the marking by hand for 15 s with a piece of cloth soaked with water and again for 15 s with a piece of cloth soaked with hexane.

After this test, the marking shall be legible; it shall not be possible to remove marking plates easily and they shall show no curling.

CEI EN 61010-1

INDELIBILITY

Ed.2 equivalent to VDE 0411-1

Safety indications for electric devices for measurement, control and laboratory use

Part 1: General indications

This regulation requires that both material and the print shall withstand, cleaning with chemical agents commonly used in industry.

By rubbing manually by hand, without excessive pressure, for 30 seconds with a cloth soaked in the specific detergent or, if not specified, Isopropyl Alcohol.

CEMBRE STANDARD

INDELIBILITY


This test was created to simulate cleaning with chemical products commonly used on various surfaces.

By wiping with a cloth soaked in 95% Ethanol 30 times and making a visual inspection after every 10 passes.

9MM LEGENDS TAR-ROLL

Technical characteristics

Min operating temperature range	-30 °C
Max operating temperature range	80 °C
UL94 class	V0
Material	Rigid PVC
Precut	yes
Geometric shape	rectangular with square corners

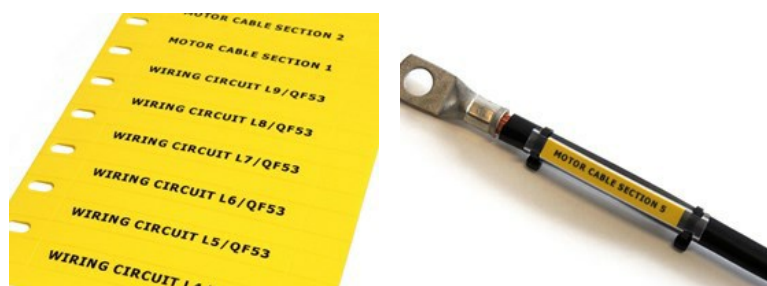

9MM LEGENDS TAR-ROLL

List of products

TAR-ROLL

Type	Height	Length	Pack qty	SWcode	Colour
TAR-ROLL 75099	9 mm	70 mm	1,450	4300	White
TAR-ROLL 75049	9 mm	70 mm	1,450	4300	Yellow

Products used together

Printers

Thermal transfer printer for roll media ROLLY3000 - Thermal transfer printer for roll media ROLLY3000

Thermal transfert printer on roll ROLLY2000 990910 - ROLLY2000 990910